End clamp for framed modules



Material


Aluminium · AlMgSi0,5 F25

Technical information

Documented configuration	**End clamp for framed modules**

Specify the required dimensions and installation conditions in your enquiry. Compatibility and supply configuration are assessed for the individual project.

Dimensions and configurations

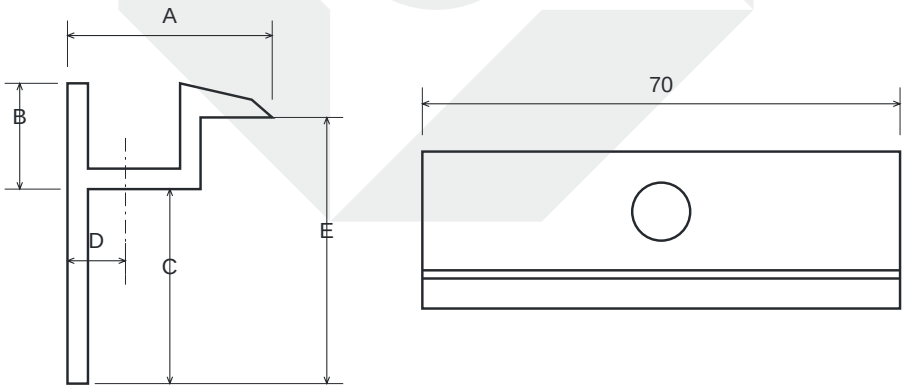

Dueemme dimensional reference diagram; not a manufacturing drawing.

Configuration	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
30	30	15.5	18.5	8.5	29 ± 0.3
31	30	15.5	19.5	8.5	30 ± 0.3
32	30	15.5	20.5	8.5	31 ± 0.3

https://www.dueemmesidol.it/en/products/solar/end-clamp-for-framed-modules/

Configuration	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
33	30	15.5	21.5	8.5	32 ± 0.3
34	30	15.5	22.5	8.5	33 ± 0.3
35	30	15.5	23.5	8.5	34 ± 0.3
36	30	15.5	24.5	8.5	35 ± 0.3
38	30	15.5	26.5	8.5	37 ± 0.3
40	30	15.5	28.5	8.5	39 ± 0.3
41	30	15.5	29.5	8.5	40 ± 0.3
42	30	15.5	30.5	8.5	41 ± 0.3
43	30	15.5	31.5	8.5	42 ± 0.3
44	30	15.5	32.5	8.5	43 ± 0.3
45	30	15.5	33.5	8.5	44 ± 0.3
46	30	15.5	34.5	8.5	45 ± 0.3
47	30	15.5	35.5	8.5	46 ± 0.3
48	30	15.5	36.5	8.5	47 ± 0.3
50	30	15.5	38.5	8.5	49 ± 0.3