


End clamp for framed modules

Technical configuration sheet | 29.09.2026

Material: Aluminium · AlMgSi0,5 F25

Dimensioned reference drawing

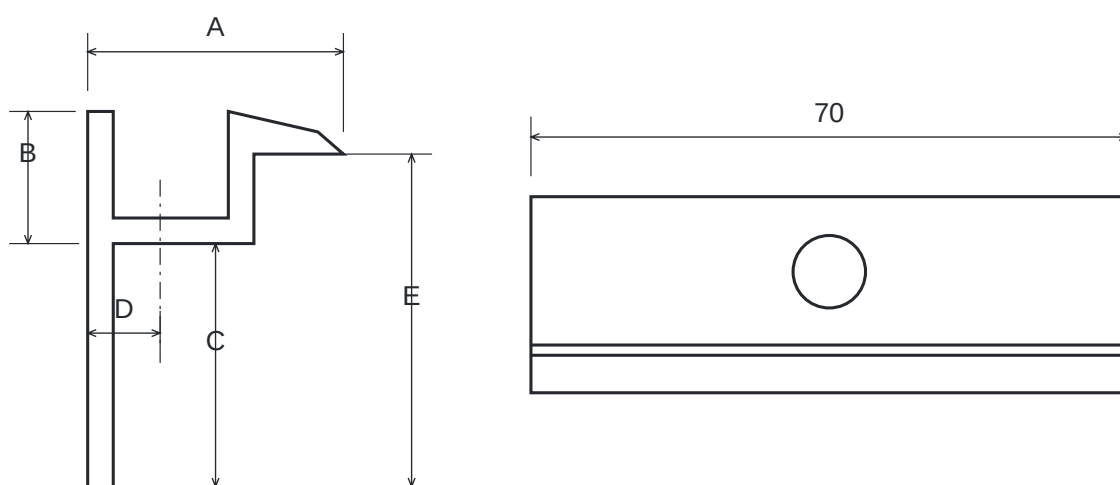

Configuration	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
30	30	15.5	18.5	8.5	29 ± 0.3
31	30	15.5	19.5	8.5	30 ± 0.3
32	30	15.5	20.5	8.5	31 ± 0.3
33	30	15.5	21.5	8.5	32 ± 0.3
34	30	15.5	22.5	8.5	33 ± 0.3
35	30	15.5	23.5	8.5	34 ± 0.3
36	30	15.5	24.5	8.5	35 ± 0.3
38	30	15.5	26.5	8.5	37 ± 0.3
40	30	15.5	28.5	8.5	39 ± 0.3
41	30	15.5	29.5	8.5	40 ± 0.3

Configuration	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
42	30	15.5	30.5	8.5	41 ± 0.3
43	30	15.5	31.5	8.5	42 ± 0.3
44	30	15.5	32.5	8.5	43 ± 0.3
45	30	15.5	33.5	8.5	44 ± 0.3
46	30	15.5	34.5	8.5	45 ± 0.3
47	30	15.5	35.5	8.5	46 ± 0.3
48	30	15.5	36.5	8.5	47 ± 0.3
50	30	15.5	38.5	8.5	49 ± 0.3

RFQ / Project enquiry

Specify the component, dimensions, quantity, roof covering and module details. Supply configuration and compatibility are confirmed for the individual project.

This sheet does not replace installation instructions or structural design checks.