Polished welded rings



Polished welded rings for professional supply. Compare geometry, openings and mounting across the listed variants and include the installation requirements in your enquiry.

Material


AISI 316 / A4

Variants and dimensions - Polished welded rings

D (mm)	d (mm)	Indicative catalogue working load (kg)	Breaking load (kg)
3	15	-	-
3	20	20	180
3	30	20	180
4	20	-	-
4	25	40	300
4	30	40	300
4	35	40	300
4	40	-	-
5	30	60	480
5	40	60	480
6	35	80	700
6	40	80	700
6	45	80	700
6	50	-	-
8	40	150	1250
8	50	150	1250
10	50	300	1950
10	60	300	1950
12	70	400	2750

https://www.dueemmesidol.it/en/products/marine/rings-pad-eyes/welded-stainless-ring/

Technical drawing

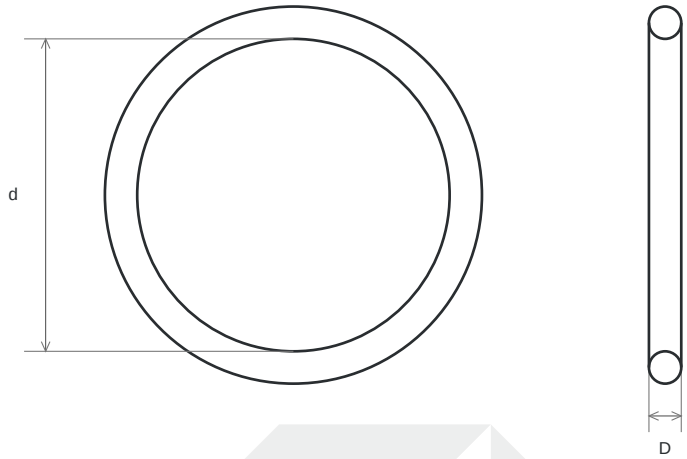

Dimensions in mm. Illustrative drawing, not to scale. Technical characteristics are indicative and may vary between batches; verify the requested variant.The updated sheet denotes inside diameter by d (L in the earlier catalogue). Listed loads come from the catalogue for documented combinations only. A dash means the load must be confirmed; no values have been inferred for additional sizes. D: section diameter; d: inside diameter

Working load and breaking load are separate ratings. The values shown do not constitute lifting certification; verify the service conditions for the selected variant.