Two-hole low-profile cleats



Two-hole low-profile cleats for professional supply. Compare mounting dimensions and fixing points across the listed variants and include the installation requirements in your enquiry.

Material

AISI 316 / A4


Finish

Polished

Variants and dimensions - Two-hole low-profile cleats

L (mm)	B (mm)	B1 (mm)	L1 (mm)	D5 (mm)	D6 (mm)	L2 (mm)	H (mm)
100	14	15	30	4,3	8	55	14
125	16	18	35	4,3	8	65	16
150	19	21	45	5,3	10	73	19
200	22	24	55	6,3	11,5	90	22
250	25	27	70	8,4	15	110	25

Technical drawing

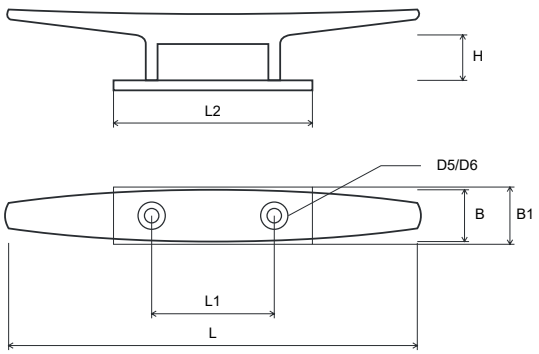

Dimensions in mm. Verify drilling positions and dimensions on the received product before machining; this drawing is not a drilling template. L: overall length; B: crossbar width; B1: base width; L1: longitudinal hole spacing; D5: hole diameter; D6: countersink diameter; H: vertical dimension in side view; L2: base length