Four-hole low-profile cleats



Four-hole low-profile cleats for professional supply. Compare mounting dimensions and fixing points across the listed variants and include the installation requirements in your enquiry.

Material

AISI 316 / A4


Finish

Polished

Variants and dimensions - Four-hole low-profile cleats

L (mm)	B (mm)	B1 (mm)	B3 (mm)	D5 (mm)	D6 (mm)	H1 (mm)	L1 (mm)
100	14	24	36	5,3	10	14	30
125	15	30	45	5,3	10	18	40
150	20	42	53	6,3	11,5	20	45
200	23	42	69	6,3	11,5	24	55
250	25	45	83	6,3	11,5	30	58

Technical drawing

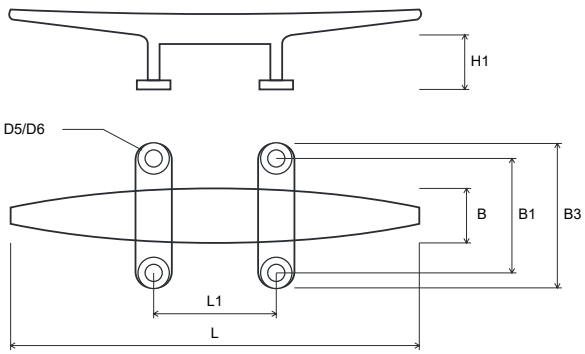

Dimensions in mm. Verify drilling positions and dimensions on the received product before machining; this drawing is not a drilling template. L: overall length; B: crossbar width; B1: transverse hole spacing; L1: longitudinal hole spacing; D5: hole diameter; D6: countersink diameter; H1: vertical dimension in side view; B3: overall foot width