# Flat single blocks with swivel eye



Flat single blocks with swivel eye for professional supply. Compare attachment, sheave and dimensions across the listed variants and include the installation requirements in your enquiry.

Material

AISI 304 / A2

Sheave

Stainless steel


Bushing

Brass

## Variants and dimensions - Flat single blocks with swivel eye

| A (mm) | B (mm) | C (mm) | D (mm) | D1 (mm) | H (mm) | L (mm) | Indicative catalogue working load (kg) | Breaking load (kg) |
|---|---|---|---|---|---|---|---|---|
| 29 | 45 | 20 | 8 | 10 | 50 | 120 | 300 | 1900 |
| 31 | 65 | 24 | 10 | 12 | 75 | 165 | 500 | 2800 |
| 34 | 89 | 24 | 12 | 16 | 100 | 200 | 800 | 3200 |

## Technical drawing

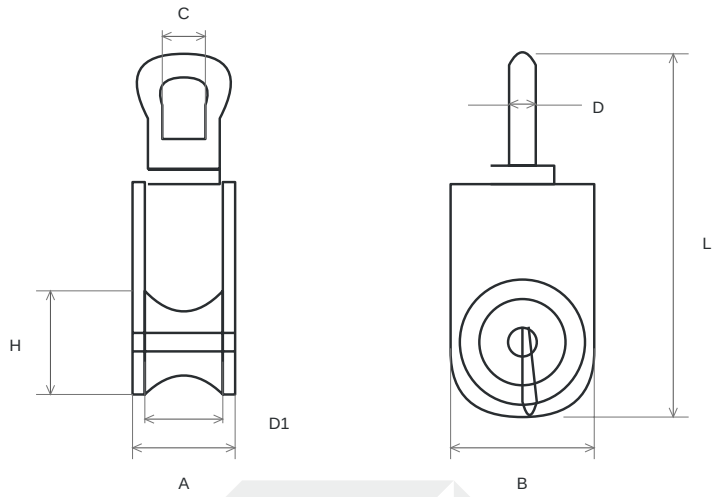


Dimensions in mm. Illustrative drawing, not to scale. Indicative loads reported in the article data sheet; characteristics may vary between batches. Breaking load is not working load. A: body width in front view; B: outside width in side view; C: inside eye width; D: eye section diameter; D1: rope diameter; H: outside sheave diameter; L: indicated overall length

Working load and breaking load are separate ratings. The values shown do not constitute lifting certification; verify the service conditions for the selected variant.