1×19 stainless steel wire rope



1×19 stainless steel wire rope. AISI 316 / A4. Compare diameters and configurations in the table.

Material

AISI 316 / A4

Variants and dimensions

Ø (mm)	Breaking load (kg)	Weight (kg/100 m)	Spool (m)
1	80	0,50	100
1	80	0,50	250
1	80	0,50	1000
1,5	180	1,13	100
1,5	180	1,13	250
2	330	2,00	100
2	330	2,00	250
2,5	520	3,13	250
3	750	4,50	100
3	750	4,50	250
4	1350	8,00	100
4	1350	8,00	250
4	1350	8,00	1000
5	2100	12,50	250
6	3000	18,00	100
7	4110	24,70	1000
8	5350	32,00	100
10	8360	50,00	100
10	8360	50,00	1000
12	11320	71,31	100
12	11320	71,31	1000

https://www.dueemmesidol.it/en/products/marine/1x19-stainless-steel-wire-rope/


Ø (mm)	Breaking load (kg)	Weight (kg/100 m)	Spool (m)
12,7	12645	80,50	1000
14	14785	97,10	1000

Dimensions and loads apply to each individual configuration. Confirm availability and supply length.

Technical drawing



1×19

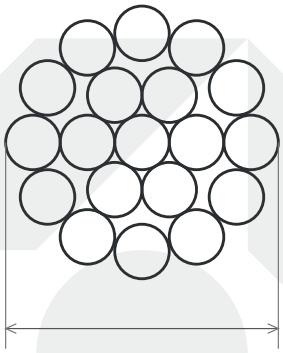

Dimensions in mm unless stated otherwise. Illustrative drawing, not to scale. Indicative source data; confirm the configuration in the enquiry. Ø: rope outside diameter. Construction 1×19; wire rope grade 1570 N/mm². Weight per 100 m; spool length in metres. Drawing shows construction, not individual wire diameters. Do not use these articles for lifting equipment, slings, load support or fall-protection systems. Breaking loads are not working loads.