7×19 stainless steel wire rope



7×19 stainless steel wire rope. AISI 316 / A4. Compare diameters and configurations in the table.

Material

AISI 316 / A4


Variants and dimensions

Ø (mm)	Breaking load (kg)	Weight (kg/100 m)	Spool (m)
1,5	120	0,92	250
1,5	120	0,92	500
1,5	120	0,92	1000
2	230	1,63	100
2	230	1,63	250
2	230	1,63	1000
2,5	360	2,55	250
3	520	3,68	100
3	520	3,68	250
3	520	3,68	500
3	520	3,68	1000
4	920	6,53	100
4	920	6,53	250
4	920	6,53	500
4	920	6,53	1000
5	1400	10,21	100
5	1400	10,21	250
5	1400	10,21	500
5	1400	10,21	1000
6	2000	14,70	100
6	2000	14,70	250

Ø (mm)	Breaking load (kg)	Weight (kg/100 m)	Spool (m)
6	2000	14,70	500
6	2000	14,70	1000
8	3350	26,14	100
8	3350	26,14	500
8	3350	26,14	1000
10	5300	40,84	100
10	5300	40,84	500
12	7600	58,20	100

Dimensions and loads apply to each individual configuration. Confirm availability and supply length.

Technical drawing

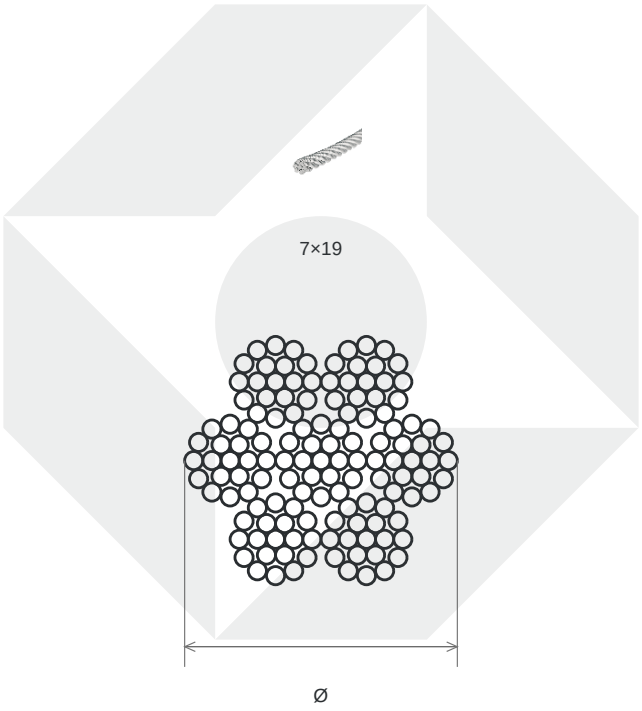

Dimensions in mm unless stated otherwise. Illustrative drawing, not to scale. Indicative source data; confirm the configuration in the enquiry. Ø: rope outside diameter. Construction 7×19; wire rope grade 1570 N/mm². Weight per 100 m; spool length in metres. Drawing shows construction, not individual wire diameters. Do not use these articles for lifting equipment, slings, load support or fall-protection systems. Breaking loads are not working loads.