PVC-coated stainless steel wire rope



AISI 316 stainless steel wire rope with white UV-resistant PVC coating. Compare core diameter, coated diameter and rope construction.

Material

AISI 316 / A4 + PVC


Variants and dimensions

Construction	d core (mm)	D coated (mm)	Breaking load (kg)	Weight (kg/100 m)	Spool (m)
7×7	3	6	550	6,00	100
7×7	4	8	950	10,00	100
1×19	4	6	1350	8,00	1000

Dimensions and loads apply to each individual configuration. Confirm availability and supply length.

Technical drawing



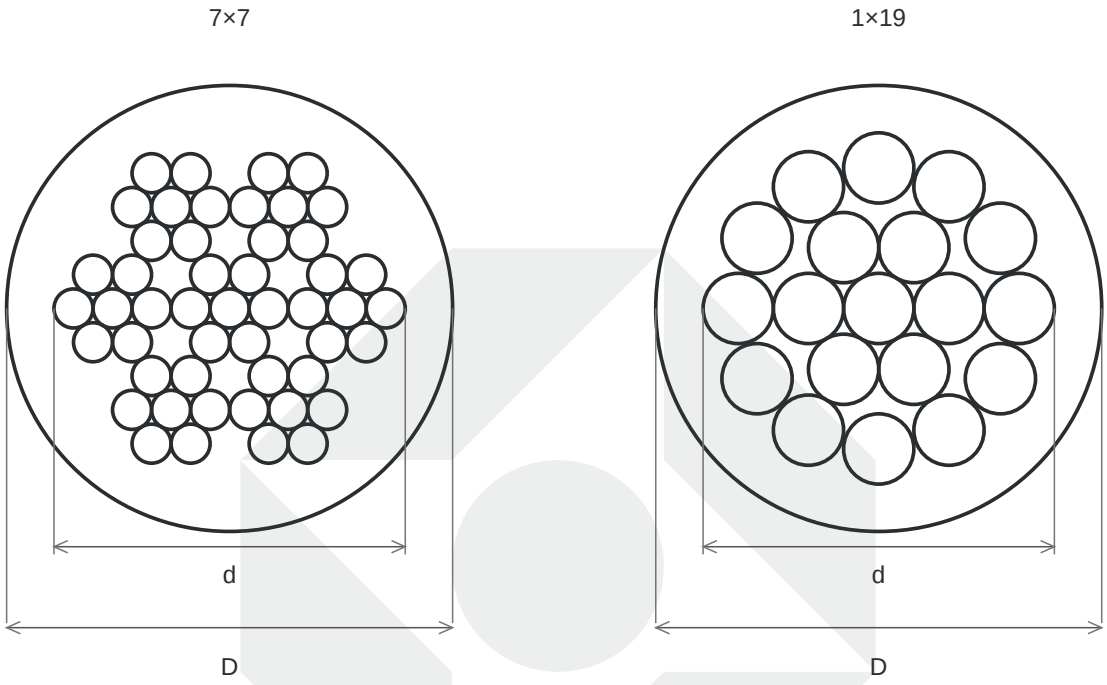

Dimensions in mm unless stated otherwise. Illustrative drawing, not to scale. Indicative source data; confirm the configuration in the enquiry. d: metallic-core diameter; D: coated outside diameter. d×D combinations are 3×6 and 4×8 for 7×7, and 4×6 for 1×19. White UV-resistant PVC coating; wire grade 1570 N/mm². Both constructions are illustrated. Do not use these articles for lifting equipment, slings, load support or fall-protection systems. Breaking loads are not working loads.