Thin-gauge hinges



Thin-gauge hinges for professional supply. Compare overall dimensions, mounting centres and handing across the listed variants and include the installation requirements in your enquiry.


Material

AISI 304 / A2

Variants and dimensions - Thin-gauge hinges

Dimensions in mm. Hole patterns vary: use the matching variant drawing. Verify dimensions on the received product before drilling; the drawing is not a drilling template. B: open height; L: pin length / width; T: leaf thickness; A1: main horizontal hole pitch; A2: main vertical hole pitch; A3: secondary vertical hole pitch, where applicable; A4: outer horizontal hole pitch, type P only; D5: hole diameter; D6: countersink diameter; P: riveted pin diameter.


Configuration A-D

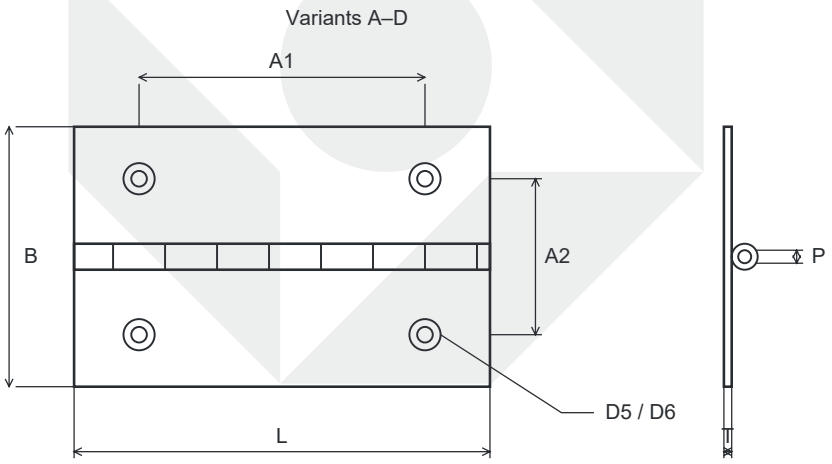

Type	Hole Ø (mm)	Countersink Ø (mm)	B (mm)	T (mm)	L (mm)	A1 (mm)	A2 (mm)	P - riveted (mm)
A	4,3	8	25	0,8	30	20	14	2,5
B	4,3	8	30	0,8	30	20	19	2,5
C	4,3	8	35	0,8	40	26	20	2,5
D	4,3	8	40	0,8	40	26	22	2,5

Configuration E-H

Variants E–H

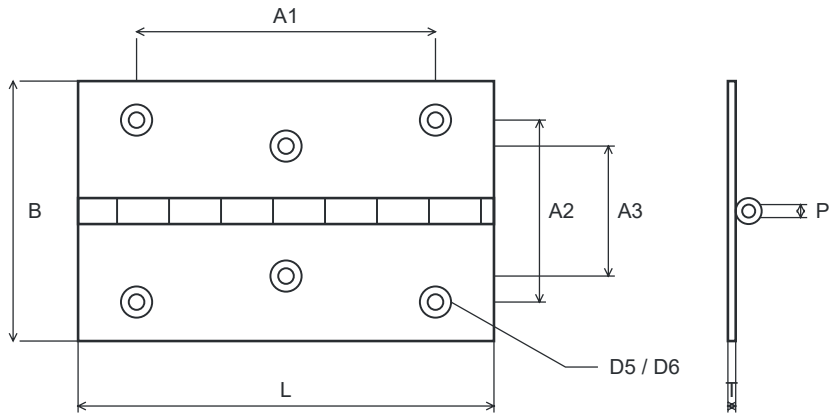

Type	Hole Ø (mm)	Countersink Ø (mm)	B (mm)	T (mm)	L (mm)	A1-A2 (mm)	A3 (mm)	P - riveted (mm)
E	4,3	8	40	0,8	50	36 - 29	21	3,5
F	4,3	8	50	0,8	50	36 - 40	21	3,5
G	4,3	8	50	0,8	60	45 - 36	25	3,5
H	4,3	8	55	0,8	70	50 - 40	30	3,5