Double-action spring hinges



Double-action spring hinges for professional supply. Compare overall dimensions, mounting centres and handing across the listed variants and include the installation requirements in your enquiry.


Material

AISI 304 / A2

Variants and dimensions


Type	A (mm)	B (mm)	C (mm)	D (mm)	Hole count	D5 (mm)	D6 (mm)	Capacity per pair (kg)
A	75	34	28	21	8	5,3	10	18
B	100	37	33	21	8	5,3	10	25

Variant drawing A

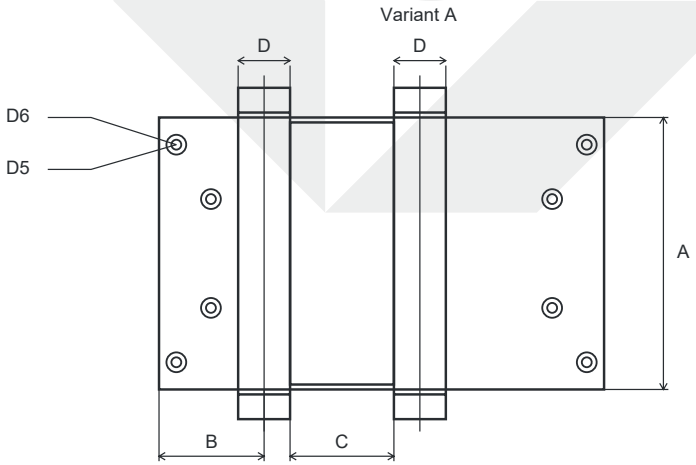

Dimensions in mm. Verify drilling positions and dimensions on the received product before machining; this drawing is not a drilling template. Declared capacity per pair of door hinges: 18 kg for A, 25 kg for B. This is not a lifting load rating. A: body height; B: leaf edge to barrel axis; C: gap between barrels; D: barrel diameter; D5: hole diameter; D6: countersink diameter

Variant drawing B

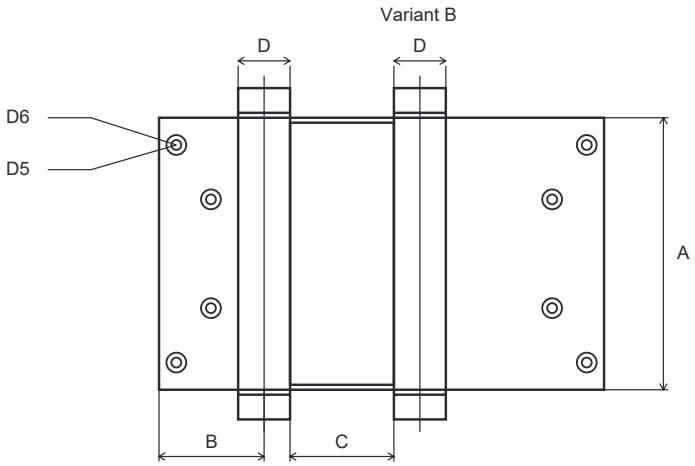

Dimensions in mm. Verify drilling positions and dimensions on the received product before machining; this drawing is not a drilling template. Declared capacity per pair of door hinges: 18 kg for A, 25 kg for B. This is not a lifting load rating. A: body height; B: leaf edge to barrel axis; C: gap between barrels; D: barrel diameter; D5: hole diameter; D6: countersink diameter