Adjustable toggle latches



AISI 304 / A2 stainless steel toggle latches. Compare type, catch geometry and mounting dimensions. State the required configuration and operating conditions in your enquiry.

Material

AISI 304 / A2


Variants and dimensions

Type	Indicated length / adjustable span (mm)	Indicated width (mm)	Indicated vertical dimension (mm)	Main holes Ø (mm)	Countersink Ø (mm)	Indicative maximum working load (approx. kg)	Ultimate tension (approx. kg)
I	60-70	25,5	18	4,3	8	101	142
L	48-60	48,5	25,5	5,3	10	152	305
M	138-150	52	17	5,3	10	112	254

Table widths and heights refer to the indicated drawing segments, which do not always represent the maximum envelope. For types I and L the adjustable span is not overall length. Further dimensions and hole centres are shown in each type’s drawing.

Configuration I




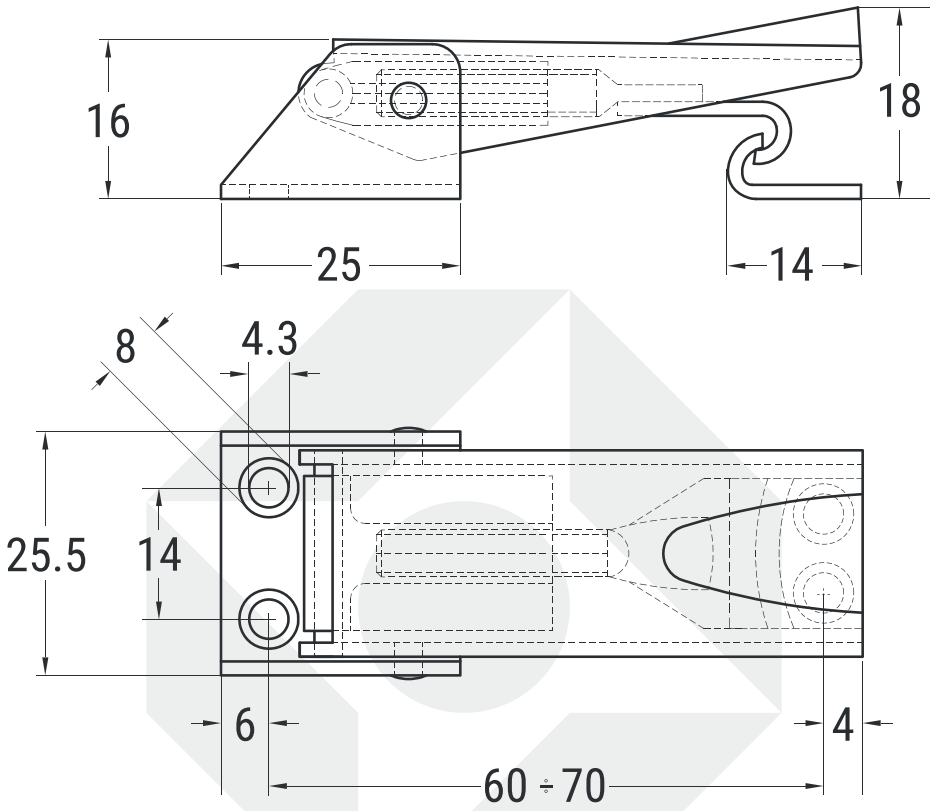

Dimensions in mm. Vector drawings are not to scale; match the configuration to its type letter. Check the delivered product before drilling. Catalogue loads are indicative; ultimate tension is not working load. Type I: 60-70 mm is the adjustable longitudinal distance between the indicated hole centres, not overall length. Transverse hole spacing 14 mm; base 25 mm; catch plate 14 mm.


Configuration L



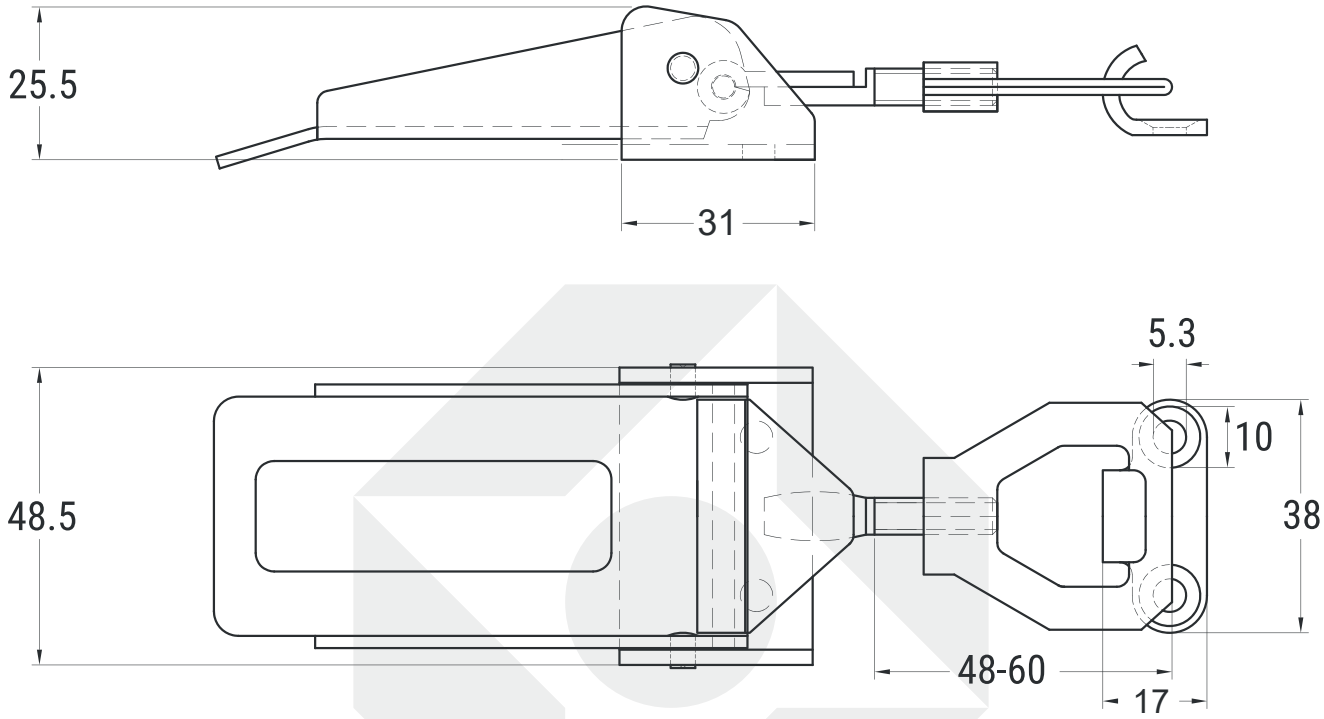

Dimensions in mm. Vector drawings are not to scale; match the configuration to its type letter. Check the delivered product before drilling. Catalogue loads are indicative; ultimate tension is not working load. Type L: 48-60 mm is the adjustable draw-link span shown, not overall length. Updated sheet: base 31 mm and catch plate 17 mm; catch plate width 38 mm.

Configuration M

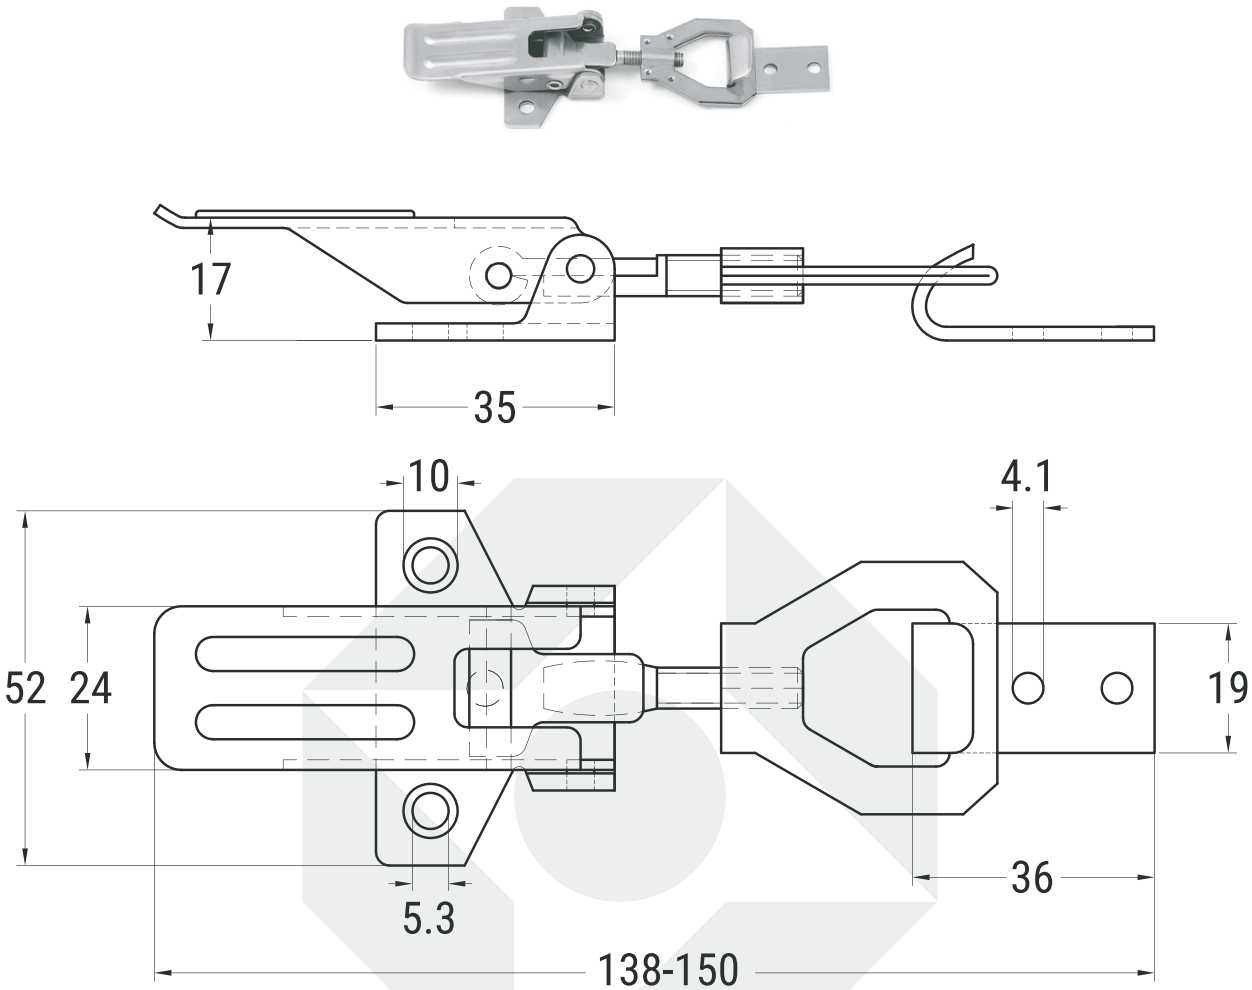

Dimensions in mm. Vector drawings are not to scale; match the configuration to its type letter. Check the delivered product before drilling. Catalogue loads are indicative; ultimate tension is not working load. Type M: adjustable overall length 138-150 mm; lever width 24 mm; base 35 mm; catch plate 36 × 19 mm with 4.1 mm holes. Base holes are 5.3 mm with 10 mm countersinks.

Working load and ultimate tension are separate ratings. The values shown do not constitute lifting certification; verify the service conditions for the selected variant.