
Toggle latches with tension springs



AISI 304 / A2 stainless steel toggle latches. Compare type, catch geometry and mounting dimensions. State the required configuration and operating conditions in your enquiry.

Material

AISI 304 / A2


Variants and dimensions


Type	Indicated length / adjustable span (mm)	Indicated width (mm)	Indicated vertical dimension (mm)	Main holes Ø (mm)	Countersink Ø (mm)	Indicative maximum working load (approx. kg)	Ultimate tension (approx. kg)
N	60-63	15	12	3,2	6	50	152

Table widths and heights refer to the indicated drawing segments, which do not always represent the maximum envelope. For types I and L the adjustable span is not overall length. Further dimensions and hole centres are shown in each type’s drawing.

Configuration N



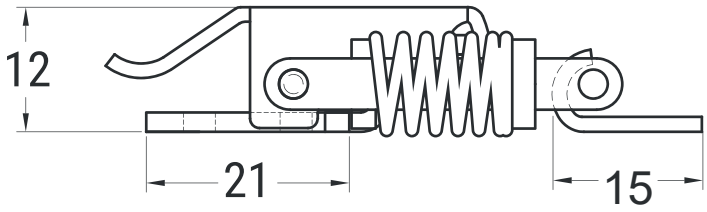

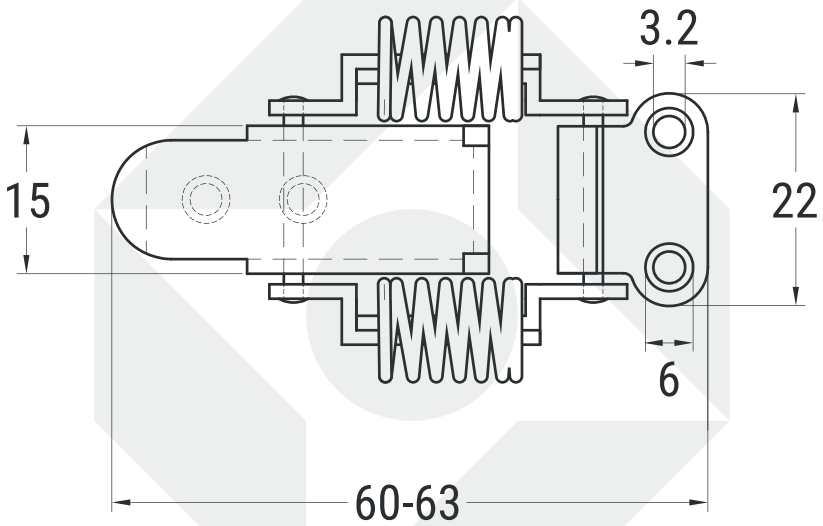

Dimensions in mm. Vector drawings are not to scale; match the configuration to its type letter. Check the delivered product before drilling. Catalogue loads are indicative; ultimate tension is not working load. Type N: indicated length 60-63 mm with tension springs; base 21 mm and catch plate 15 × 22 mm in the updated sheet.

Working load and ultimate tension are separate ratings. The values shown do not constitute lifting certification; verify the service conditions for the selected variant.