Cabinet and spring latches



Stainless cabinet and spring latches. Type 1 uses a square key and brass pin; type 2 has a spring latch bar and two mounting plates.

Material

AISI 304 / A2


Variants and dimensions

Type	H (mm)	W (mm)	P (mm)	l (mm)	d (mm)	s (mm)
1	50	18	38	32	-	-
2	62,5	19	48	43,5	4,3	8

Match each configuration to its drawing. Missing dimensions are not inferred from image scale.

Configuration 1




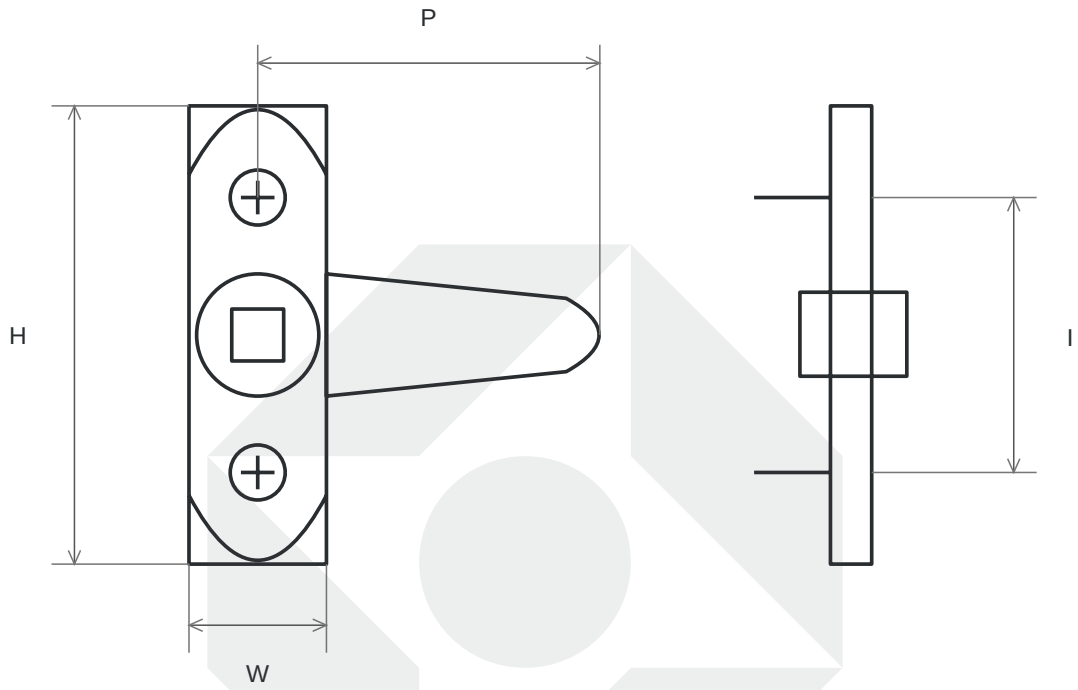

Dimensions in mm. Illustrative drawings, not to scale. Dimensions may vary between batches: check the delivered product before drilling. A dash denotes a dimension not specified in the source, requiring confirmation. Type 1, cabinet latch: H/W plate dimensions; P distance from rotation axis to tongue tip; I vertical fixing centres. Brass pin. Hole diameters unspecified. Key not included in the standard configuration; request a key-included pack separately.

Configuration 2



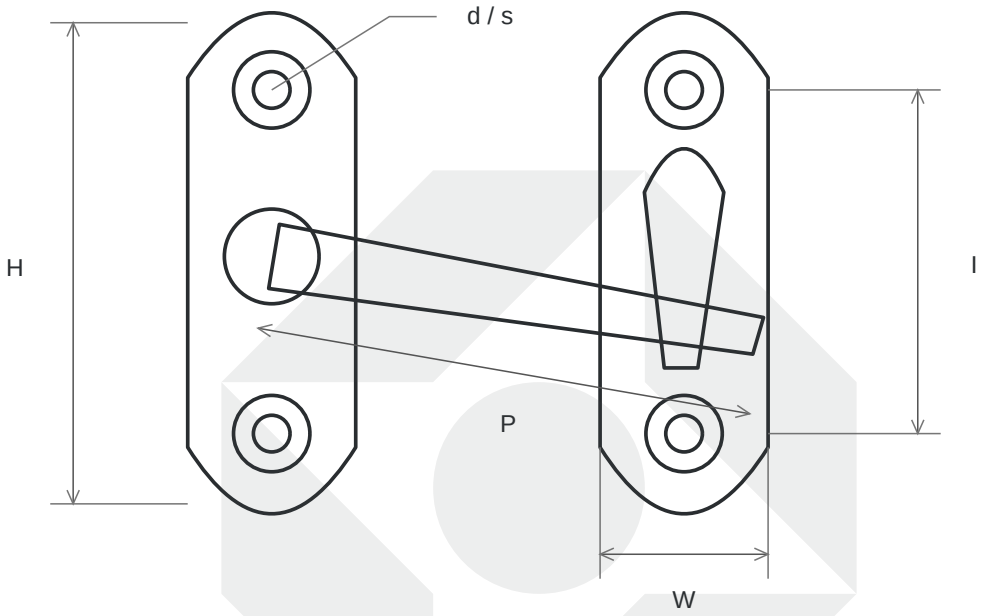

Dimensions in mm. Illustrative drawings, not to scale. Dimensions may vary between batches: check the delivered product before drilling. A dash denotes a dimension not specified in the source, requiring confirmation. Type 2, spring latch: H/W dimensions of each plate; P indicated latch-bar length; I vertical hole spacing; d/s hole and countersink diameters. P is not the spacing between the two plates.