Diamond pad eyes with loose ring, type C



Diamond pad eyes with loose ring, type C. AISI 304 / A2. Check configuration dimensions before selecting the fixing hardware.

Material


AISI 304 / A2

Variants and dimensions

D=D1 (mm)	B (mm)	A (mm)	H (mm)	H1 (mm)	L (mm)	D5 (mm)	D6 (mm)
5	36	60	23	3	30	4,3	8
6	40	65	26	3	35	4,3	8
8	50	80	32	3	45	5,3	10

Dimensions refer to the drawing symbols. Unspecified hole centre distances require confirmation.

Technical drawing

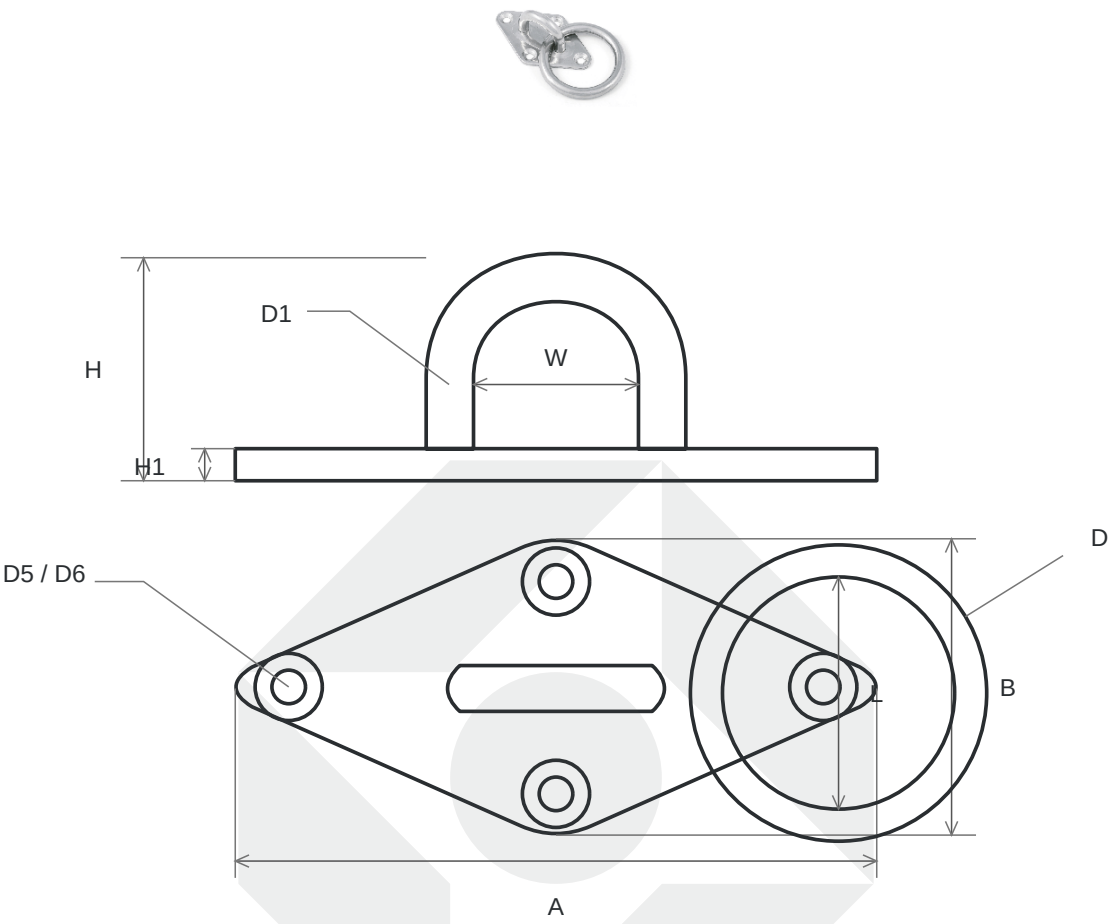

Dimensions in mm. Illustrative drawing, not to scale. Check the delivered product before drilling. A/B: base length/width; D=D1: loose-ring and fixed-eye section diameter; H: overall fixed-eye height; H1: base thickness; L: loose-ring inside diameter; D5/D6: hole and countersink diameters. H follows the updated source sheet: 23, 26 and 32 mm. Fixed-eye opening W and hole centre distances are unspecified.