Bow shackles



Bow shackles for professional supply. Compare opening, connections and dimensions across the listed variants and include the installation requirements in your enquiry.


Material

AISI 316 / A4

Variants and dimensions - Bow shackles

D (mm)	A (mm)	L (mm)	R (mm)	Indicative catalogue working load (kg)	Breaking load (kg)
4	8	14	14	90	650
5	10	17	17	100	950
6	12	21	21	150	1450
8	16	28	28	250	2450
10	20	34	35	500	3950
12	24	42	42	600	5950
13	26	45	45	800	6550
16	32	56	56	1100	9950

Technical drawing

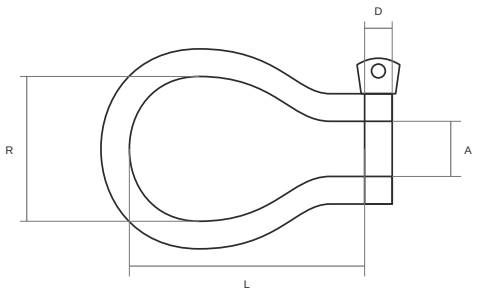

Dimensions in mm. Illustrative drawing, not to scale; variant dimensions are given in the table. D: pin diameter; A: inside opening at the pin; L: inside length to the pin surface; R: maximum inside bow width

Working load and breaking load are separate ratings. The values shown do not constitute lifting certification; verify the service conditions for the selected variant.

https://www.dueemmesidol.it/en/products/marine/bow-shackles/