Split cylindrical wire rope collars



Split cylindrical wire rope collars in AISI 316 stainless steel. Compare rope diameter, dimensions and configurations in the table.

Material


AISI 316 / A4

Variants and dimensions

D1 rope (mm)	D2 (mm)	B1 (mm)	M thread (2 screws)	SW (mm)
2	15	10	M3	2,5
3	15	10	M3	2,5
4	15	10	M3	2,5
5	20	10	M3	2,5
6	20	10	M3	2,5
8	23	12	M4	3

Indicative dimensions, subject to production variations. The table does not establish a load rating for the clamp or assembly.

Technical drawing

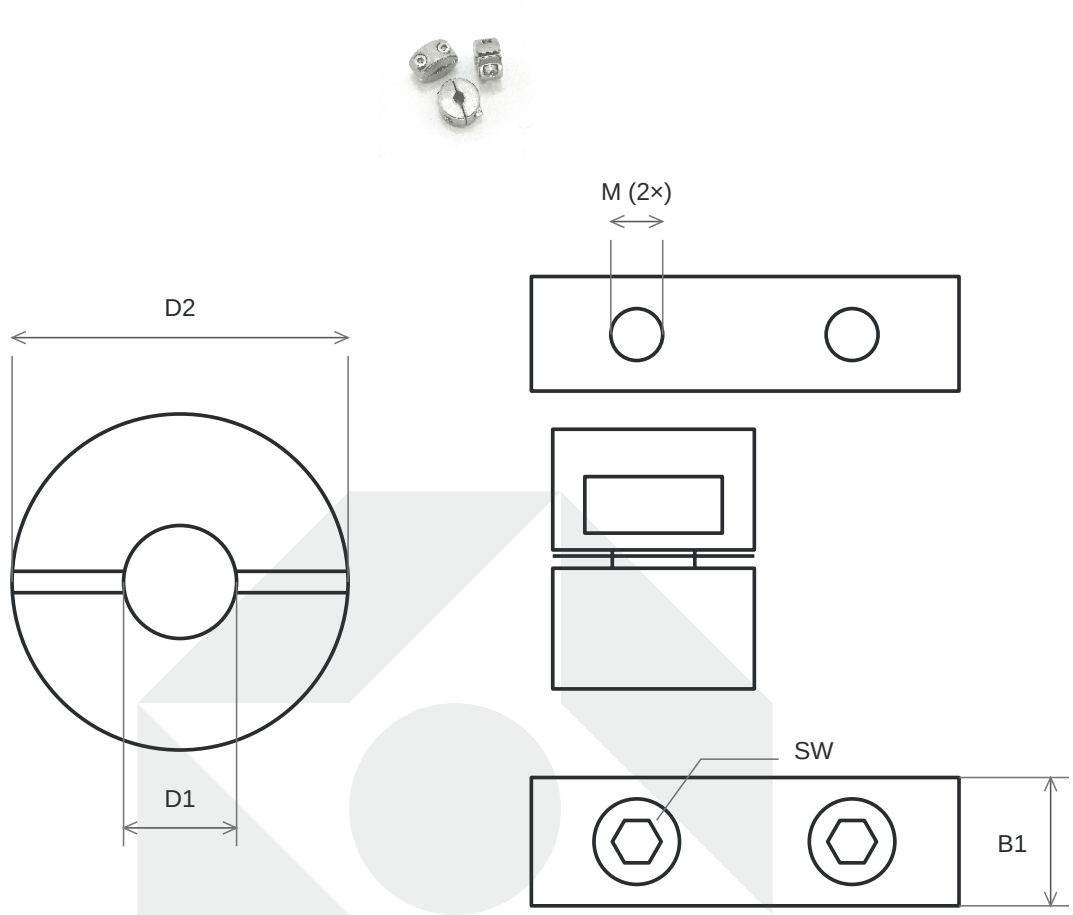

Dimensions in mm, except metric thread M. Illustrative drawing, not to scale. Confirm dimensions and configuration in the enquiry. D1: rope diameter; D2: collar outside diameter; B1: axial width; M: thread of the two screws; SW: hex key size. Two-piece split collar, polished finish. Dimensions alone do not establish an allowable load or tightening torque.