Straight-gate snap hooks



Straight-gate snap hooks for professional supply. Compare opening, connections and dimensions across the listed variants and include the installation requirements in your enquiry.


Material

AISI 316 / A4

Variants and dimensions - Straight-gate snap hooks

D (mm)	L (mm)	A (mm)	E (mm)	Indicative catalogue working load (kg)	Breaking load (kg)
5	50	8	7	/	120
6	60	8,5	8	/	120
7	72	10,5	10	/	180
8	80	11,5	10	200	800
10	103	14	15,5	300	1200
10,5	121	17	17	500	2000
13	160	22,5	30	600	2400

Technical drawing

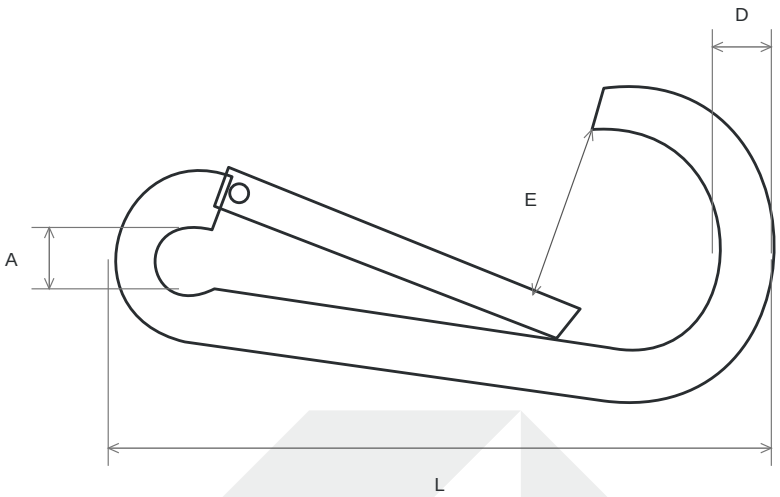

Dimensions in mm. Illustrative drawing, not to scale. Characteristics are indicative and may vary between batches; verify the requested variant. Breaking load refers to the major axis with the gate closed. A slash denotes an unspecified working load. D: section diameter; L: overall length; A: inside eye opening; E: clear gate or bolt opening

Working load and breaking load are separate ratings. These accessories are not intended for lifting equipment, slings, load-support devices or fall-protection systems. Verify the indicative values for the selected variant and service conditions.