Quick-release fork snap shackles



Quick-release fork snap shackles for professional supply. Compare opening, connections and dimensions across the listed variants and include the installation requirements in your enquiry.

Material

AISI 316 / A4

Spring


AISI 304

Variants and dimensions - Quick-release fork snap shackles

L (mm)	A (mm)	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)
68	13	5	20	1,5	3,8	6
87	16	6	20	1,5	4,5	8
128	22	10	20	1,5	5,0	10

L (mm)	H (mm)	W (mm)	Indicative catalogue working load (kg)	Breaking load (kg)
68	12,5	10	-	640
87	15	12	-	880
128	25	20	-	1630

Technical drawing

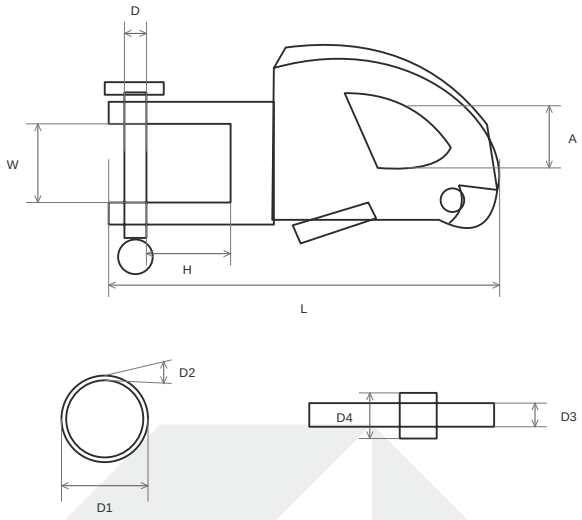

Dimensions in mm. Illustrative drawing, not to scale. Characteristics are indicative and may vary between batches; verify the requested variant. The updated sheet specifies breaking load only; working load must be confirmed and is not inferred from breaking load. Documented tolerances: L, A, D1, D2, D3 and D4 ±5%; D and H −8%/+2%; W −0%/+10%. L: overall length; A: inside hook opening; D: jaw pin diameter; D1: outside pull-ring diameter; D2: pull-ring wire diameter; D3: release pin diameter; D4: release pin head diameter; H: inside jaw depth to the pin; W: inside jaw opening

Working load and breaking load are separate ratings. These accessories are not intended for lifting equipment, slings, load-support devices or fall-protection systems. Verify the indicative values for the selected variant and service conditions.