Right- and left-hand skene chocks



Identify right- and left-hand versions to suit the installation. State the handing, overall length and mounting centres in your enquiry.

Material

AISI 316 / A4


Finish

Investment cast, polished

Variants and dimensions - Right- and left-hand skene chocks

L (mm)	L1 (mm)	B (mm)	M (mm)	Wire rope Ø (mm)	D5 (mm)	D6 (mm)	H (mm)
115 R	98	23	15	10	4,3	8	25
115 L	98	23	15	10	4,3	8	25
150 R	124	35	26	16	5,3	10	30
150 L	124	35	26	16	5,3	10	30

Technical drawing

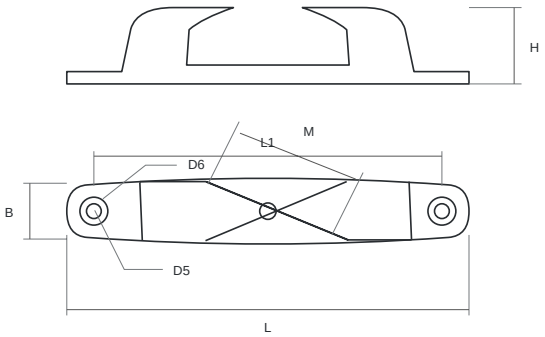

Dimensions in mm. Illustrative drawing of one of the two mirror-image versions, not to scale. Specify R (right) or L (left). Check the received product before drilling: dimensions may vary between batches. L: overall length; R right, L left; L1: fixing hole spacing; B: base width; M: oblique width shown in the plan view; Ø cavo: rope diameter, tabulated value; D5: fixing hole diameter; D6: countersink diameter; H: overall height