Bimini hinges with flat base



Bimini hinges with flat base in polished AISI 316 stainless steel. Compare configuration, diameters and dimensions for bimini installation.

Material

AISI 316 / A4

Variants and dimensions


L (mm)	L1 (mm)	D (mm)	D1 (mm)	D2 (thread)	H (mm)	H1 (mm)
57	40	5,3	10	M6	35	1

L (mm)	H2 (mm)	T (mm)	W (mm)	W1 (mm)
57	27	5	7,5	17

Indicative dimensions of the documented configuration; subject to batch variations. Check compatibility and fastening on the delivered product. Source tolerances: L/L1/D/D1/H/H2 ±3%; H1 ±4%; T/W1 ±5%; W −0.05/+0.15 mm.

Technical drawing



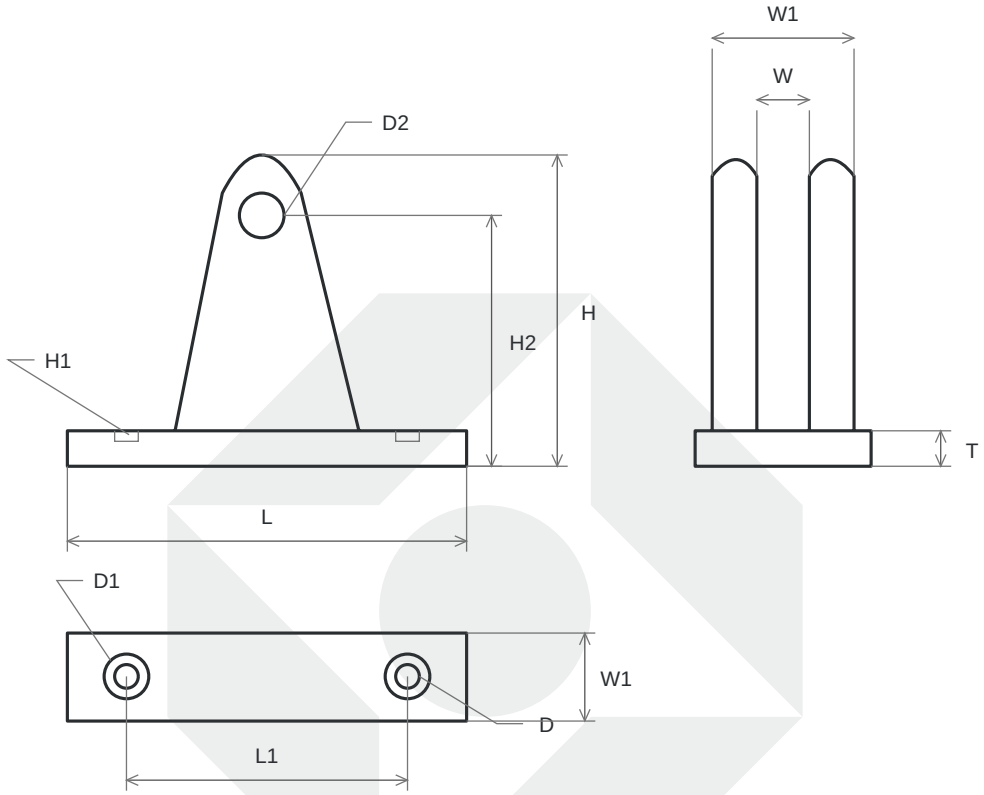

Dimensions in mm, except threads. Illustrative drawing, not to scale. Verify the component and mating parts before drilling or assembly. L: base length; L1: fixing centres; D: fixing hole; D1: countersink; D2: jaw connection; H: overall height; H2: pin-axis height from the lower plane; T: base thickness; W: jaw opening; W1: base width. H1 is an auxiliary fixing-hole detail dimension, to be checked on the part.