

Closed-body eye-eye turnbuckles



Closed-body eye-eye turnbuckles in AISI 316 stainless steel. Compare dimensions and end fittings before enquiring.

Material


AISI 316 / A4

Variants and dimensions

D1 thread	L (mm)	L1 (mm)	D (mm)	D3 (mm)	D4 (mm)	T (mm)	W (mm)	Source working load (kg)	Source breaking load (kg)
M5	120	80	5,5	8	2,5	3	12	135	540
M6	135	95	6,5	10	3,2	4	14	196	785
M8	160	105	8,5	13	4,2	5	17	355	1417
M10	190	125	11	17	5,0	6	22	556	2222
M16	275	190	15	27	8,0	10	31	/	/

Any load values shown are as reported by the source, not assembly certification. Products are not intended for lifting or fall protection. Verify configuration, thread engagement and service conditions.

Technical drawing

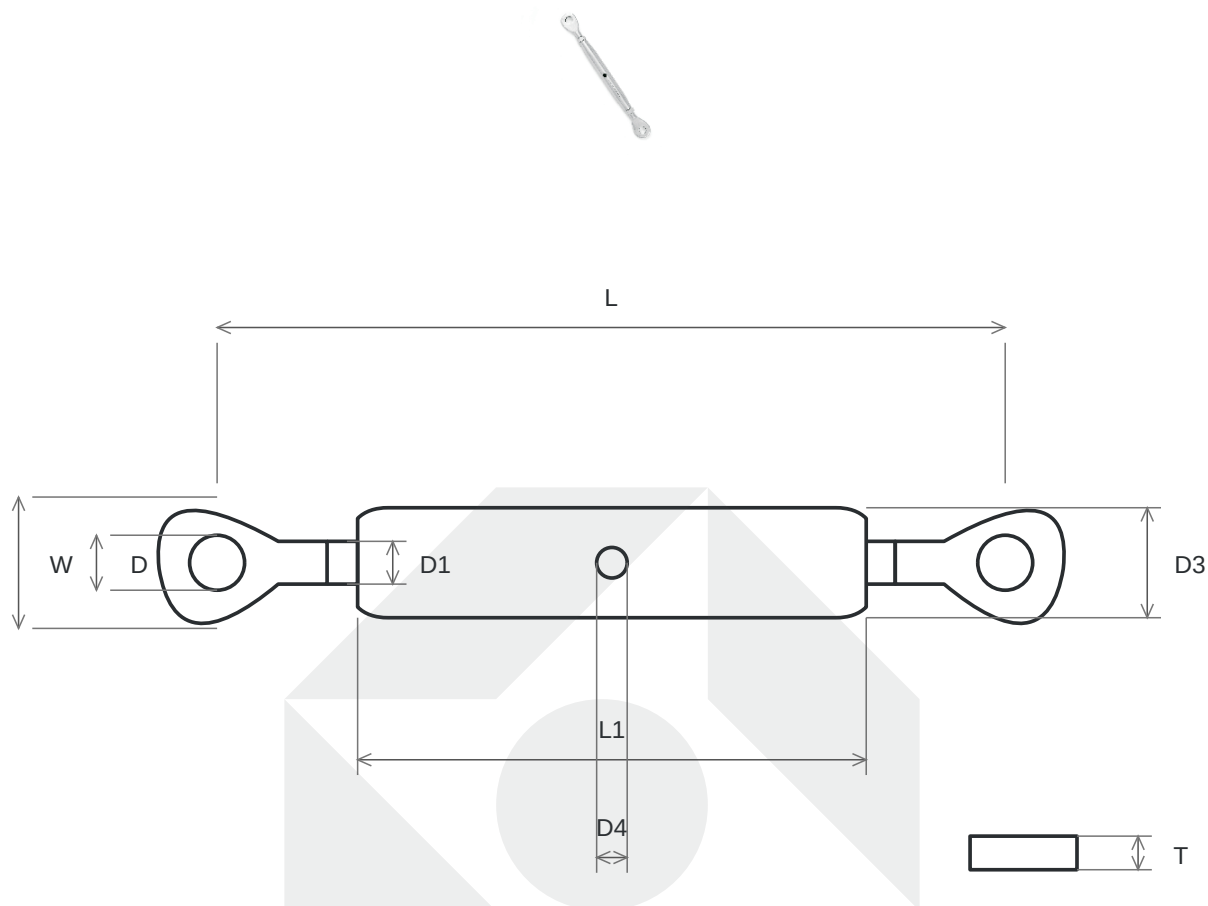

Dimensions in mm, except metric thread M. Illustrative drawing, not to scale. Verify dimensions on the delivered product. D1: thread; L: eye-centre distance in the illustrated configuration; L1: body length; D: eye bore; D3: body diameter; D4: cross hole; T: eye thickness; W: eye width. Slashes denote an undeclared load value.