Right-hand internally threaded mini swage terminals



Right-hand internally threaded mini swage terminals in AISI 316 stainless steel. Compare interfaces and dimensions for the required configuration.

Material

AISI 316 / A4


Variants and dimensions

Rope Ø (mm)	D1 (mm)	L1 (mm)	D2 (mm)	L2 (mm)	D3 thread	L3 (mm)	Thread hand
3	6,25	55	3,3	28	M5	20	RH
4	7,5	65	4,3	36	M6	22	RH
5	9,0	70	5,3	41	M6	22	RH
6	12,6	85	6,4	53	M8	25	RH

Verify rope, terminal, attachment and tooling compatibility. Dimensions do not establish an assembly load rating.

Technical drawing



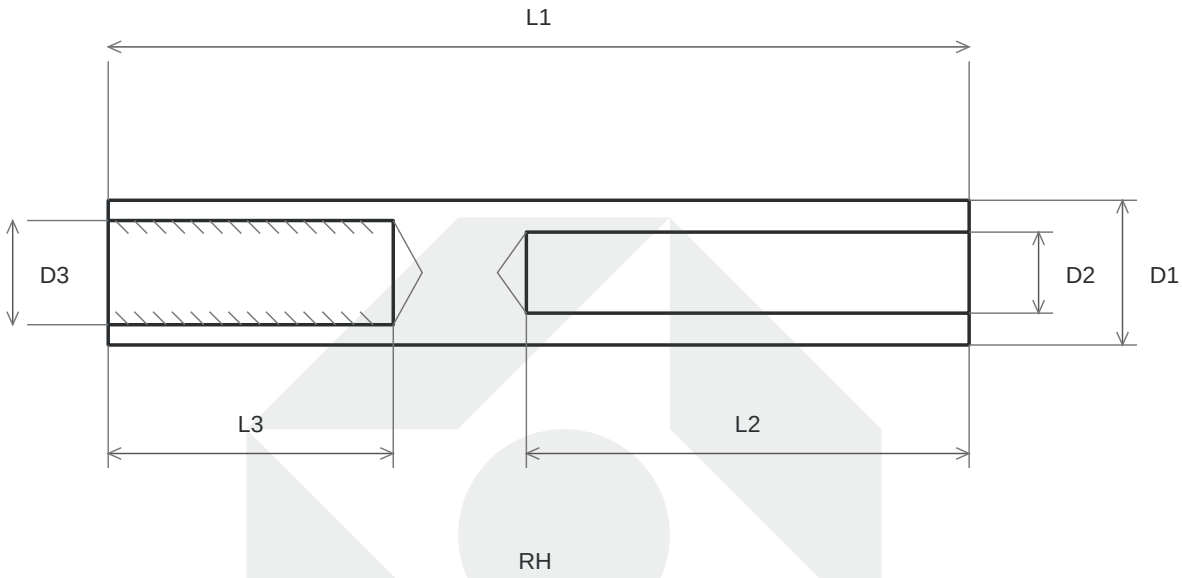

Dimensions in mm, except metric thread M. Illustrative drawing, not to scale. Swage-terminal dimensions apply before processing. D1: outside diameter; L1: overall length; D2: rope bore; L2: rope-bore depth; D3: right-hand internal thread (RH); L3: thread depth. Smooth polished finish. Dimensions follow revision 2 of the source sheet. Select the die by outside diameter; do not assume interchangeability.