Long-shank stainless steel eye bolt



AISI 316 stainless steel long-shank eye bolt for marine connections. Compare thread, shank length and eye opening. Not intended for lifting equipment, slings, load support or fall-protection systems.

Material


AISI 316 / A4

Variants and dimensions

D1	D2 (mm)	D3 (mm)	L (mm)	H (mm)	H1 (mm)	K (mm)	Indicative working load (kg)	Breaking load (kg)
M6	12	15	60	29	9	5	50	300
M8	15	19	80	37	12	6	370	1470
M10	19	25	100	48	15	8	577	2300
M12	23	30	120	59	19	10	832	3320

Indicative loads for the documented configuration: working load and breaking load are distinct. They do not constitute lifting certification. Confirm configuration and application in the enquiry.

Technical drawing

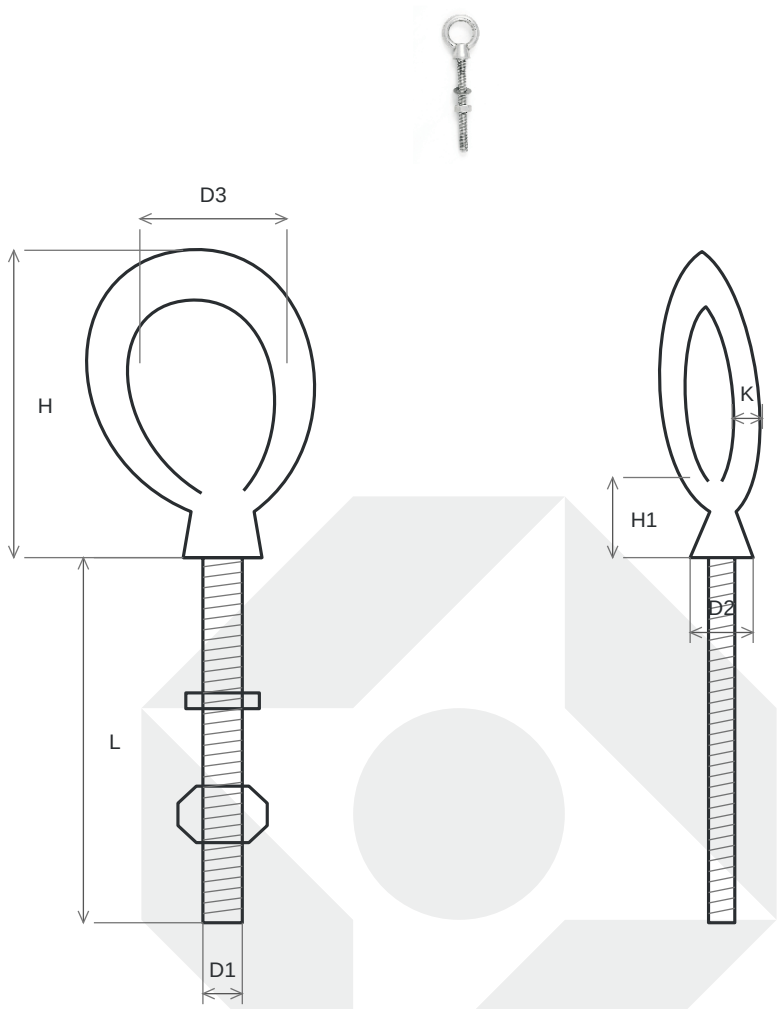

Dimensions in mm. Illustrative drawing, not to scale. Verify dimensions and installation on the delivered product. D1: metric thread; D2: collar diameter; D3: eye inside width; L: shank length below collar; H: eye-and-collar height; H1: collar height; K: eye radial thickness. Tolerances D2/H/H1/K −8%/+2%, D3 ±5%, L 0/+3P, where P is thread pitch.

Documentation and selection criteria

Specify the documentation required with your enquiry. Confirm mounting dimensions, compatibility and service conditions for the selected variant before installation.