Hexagon socket set screw with flat point

Headless screw for locking and positioning. Dimensions, materials and surface treatments grouped in one data sheet.


ISO 4026 / DIN 913

Dimensional reference: ISO 4026 · DIN reference: DIN 913 · Drive: Hexagon socket · Units: mm



Representative geometry photograph. Material and finish are specified separately.

Technical drawing

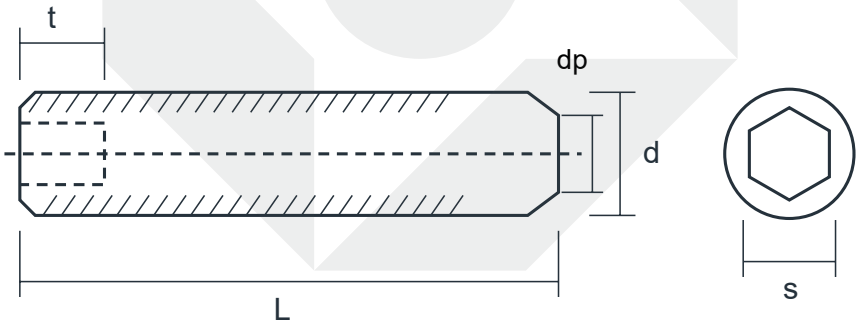

Schematic, not to scale. The table defines dimensions.

d: Nominal thread · L: Overall length · s: Hexagon socket size · t: Minimum socket depth · dp max.: Point diameter

Reference geometry

Dimensions in mm. Supply lengths are not listed: specify the required length in your enquiry.

Values separated by / distinguish geometric executions. Socket depth and point form depend on the execution and must be confirmed on the required drawing.

d	s	t min.	dp max.
M3	1.5	1.2 / 2	2
M4	2	1.5 / 2.5	2.5
M5	2.5	2 / 3	3.5
M6	3	2 / 3.5	4
M8	4	3 / 5	5.5
M10	5	4 / 6	7
M12	6	4.8 / 8	8.5
M14	6	5.6 / 9	10
M16	8	6.4 / 10	12
M18	10	7.2 / 11	13
M20	10	8 / 12	15
M22	12	9 / 13.5	17
M24	12	10 / 15	18

Materials, grades, finishes and treatments

Material	Grade / hardness	Finish
Steel	45H	Uncoated; Zinc plated clear; zinc plated black
Stainless steel A2	To specify according to ISO 3506-3	To specify
Stainless steel A4	To specify according to ISO 3506-3	To specify
Nylon	Not applicable	Natural

45H is a set-screw hardness class according to ISO 898-5, not tensile property class 8.8 or 10.9. For stainless steel, specify the class according to ISO 3506-3. Dueemme confirms material, finish and size in its quotation.

Documentation

Document	Status
Declaration of conformity	Subject to order agreement
Material certificate	Subject to order agreement
EN 10204 2.2 test report	Subject to order agreement
EN 10204 3.1 inspection certificate	Subject to order agreement
Dimensional inspection report	Subject to order agreement
Coating report	Subject to order agreement
Other documentation	Subject to order agreement

Batch documents are not automatically included: specify your requirements in the RFQ.

Standards, types and application

The dimensional table refers to ISO 4026. DIN 913 and UNI 5923 are related references: verify the edition and differences before substitution.

Set screws lock by point pressure against the component. They are not intended for tensile loading like headed screws. Assess tightening torque and component strength for the actual joint.

For high-hardness steels with electroplated finishes, assess hydrogen embrittlement and ISO 4042 requirements; post-treatment alone does not guarantee elimination of the risk.

Technical references

Berardi - ISO 4026 / DIN 913

Inoxmare - ISO 4026 / DIN 913 A2 / A4

Vite senza testa (grano) estremità piana DIN 913 acciaio classe 45H zincato bianco

Vite senza testa (grano) estremità piana DIN 913 nylon naturale

Vite senza testa (grano) estremità piana DIN 913 acciaio inox A2

Vite senza testa (grano) estremità piana DIN 913 acciaio classe 45H zincato nero

Vite senza testa (grano) estremità piana DIN 913 acciaio classe 45H passo fine zincato bianco

https://www.dueemmesidol.it/en/products/standard-fasteners/screws-bolts/iso-4026/

Vite senza testa (grano) estremità piana DIN 913 acciaio classe 45H passo fine

Vite senza testa (grano) estremità piana DIN 913 acciaio classe 45H

Vite senza testa (grano) estremità piana DIN 913 acciaio inox A4