


Tabbed self-locking bore rings

Retention relies on the resilient action of the ring against the mounting surface, without a conventional groove. Mating-part material, hardness and finish are part of the application assessment. Holding force must be established for the specific variant.



Family illustration.

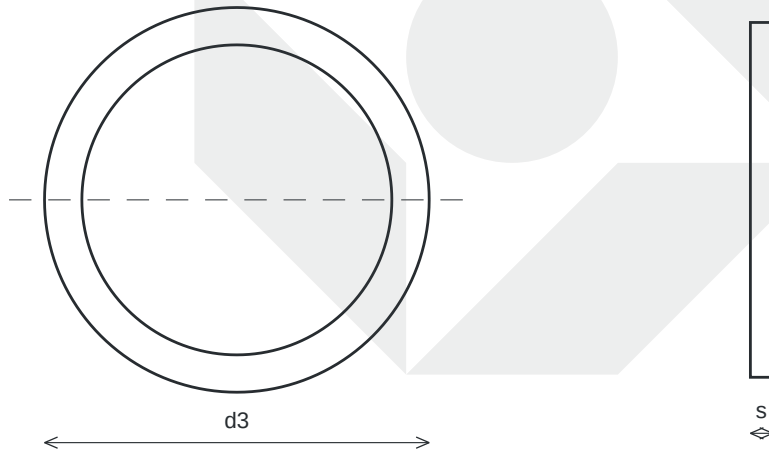

Dimension-reference diagram, not to scale. The illustrated geometry is indicative. The variant production drawing is confirmed with the quotation.

Reference technical range. Material, finish and supply are confirmed against the enquiry. Dueemme article codes are pending mapping. No manufacturer load rating or performance is automatically attributed to the supply.

Technical variants

A dash means an undocumented value, not zero.

Size / reference mm	Thickness / wire mm	Material	Finish
8.0	0.25	Steel	Phosphated or blackened, oiled
10.0	0.25	Steel	Phosphated or blackened, oiled
12.0	0.25	Steel	Phosphated or blackened, oiled
14.0	0.3	Steel	Phosphated or blackened, oiled
15.0	0.3	Steel	Phosphated or blackened, oiled
16.0	0.3	Steel	Phosphated or blackened, oiled
17.0	0.3	Steel	Phosphated or blackened, oiled
18.0	0.4	Steel	Phosphated or blackened, oiled
20.0	0.4	Steel	Phosphated or blackened, oiled
22.0	0.5	Steel	Phosphated or blackened, oiled
25.0	0.5	Steel	Phosphated or blackened, oiled
26.0	0.5	Steel	Phosphated or blackened, oiled
28.0	0.5	Steel	Phosphated or blackened, oiled
30.0	0.5	Steel	Phosphated or blackened, oiled
32.0	0.5	Steel	Phosphated or blackened, oiled
35.0	0.5	Steel	Phosphated or blackened, oiled
40.0	0.5	Steel	Phosphated or blackened, oiled
45.0	0.5	Steel	Phosphated or blackened, oiled
50.0	0.5	Steel	Phosphated or blackened, oiled
8.0	0.25	Stainless steel	Specify in enquiry
10.0	0.25	Stainless steel	Specify in enquiry
12.0	0.25	Stainless steel	Specify in enquiry
14.0	0.3	Stainless steel	Specify in enquiry
15.0	0.3	Stainless steel	Specify in enquiry
16.0	0.3	Stainless steel	Specify in enquiry
17.0	0.3	Stainless steel	Specify in enquiry
18.0	0.4	Stainless steel	Specify in enquiry
20.0	0.4	Stainless steel	Specify in enquiry
22.0	0.5	Stainless steel	Specify in enquiry
25.0	0.5	Stainless steel	Specify in enquiry
26.0	0.5	Stainless steel	Specify in enquiry
28.0	0.5	Stainless steel	Specify in enquiry

Size / reference mm	Thickness / wire mm	Material	Finish
30.0	0.5	Stainless steel	Specify in enquiry
32.0	0.5	Stainless steel	Specify in enquiry
35.0	0.5	Stainless steel	Specify in enquiry
40.0	0.5	Stainless steel	Specify in enquiry
45.0	0.5	Stainless steel	Specify in enquiry
50.0	0.5	Stainless steel	Specify in enquiry

Ring dimensions · mm

A dash means an undocumented value, not zero.

Reference mm	s	d3	d4
10.0	0,250	10,200	5,00
12.0	0,250	12,250	6,00
14.0	0,300	14,300	8,00
15.0	0,300	15,300	9,00
16.0	0,300	16,300	10,00
17.0	0,300	17,300	11,00
18.0	0,400	18,300	10,50
20.0	0,400	20,450	11,00
22.0	0,500	22,450	13,00
25.0	0,500	25,350	16,00
26.0	0,500	26,400	17,00
28.0	0,500	28,500	19,00
30.0	0,500	30,400	21,00
32.0	0,500	32,550	22,50
35.0	0,500	35,400	25,00
40.0	0,500	40,400	30,00
45.0	0,500	45,550	35,00
50.0	0,500	50,500	39,00
8.0	0,250	8,250	4,00

Request a quote

Specify type, standard, diameter, material, finish, quantity, application and required delivery. Attach the seat drawing. Other materials and finishes are available on request.
www.dueemmesidol.it