


Tabbed self-locking shaft rings

Retention relies on the resilient action of the ring against the mounting surface, without a conventional groove. Mating-part material, hardness and finish are part of the application assessment. Holding force must be established for the specific variant.



Family illustration.

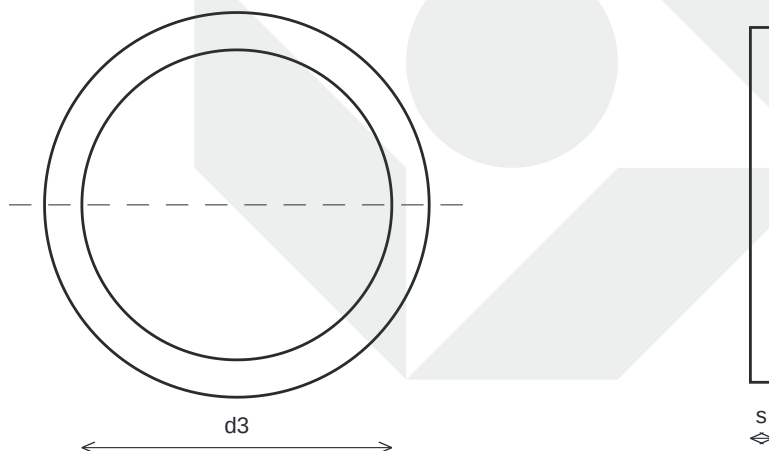

Dimension-reference diagram, not to scale. The illustrated geometry is indicative. The variant production drawing is confirmed with the quotation.

Reference technical range. Material, finish and supply are confirmed against the enquiry. Dueemme article codes are pending mapping. No manufacturer load rating or performance is automatically attributed to the supply.

Technical variants

A dash means an undocumented value, not zero.

Size / reference mm	Thickness / wire mm	Material	Finish
1.5	0.25	Steel	Phosphated or blackened, oiled
2.0	0.25	Steel	Phosphated or blackened, oiled
3.0	0.25	Steel	Phosphated or blackened, oiled
3.5	0.25	Steel	Phosphated or blackened, oiled
4.0	0.25	Steel	Phosphated or blackened, oiled
5.0	0.25	Steel	Phosphated or blackened, oiled
6.0	0.25	Steel	Phosphated or blackened, oiled
7.0	0.25	Steel	Phosphated or blackened, oiled
8.0	0.25	Steel	Phosphated or blackened, oiled
9.0	0.3	Steel	Phosphated or blackened, oiled
10.0	0.3	Steel	Phosphated or blackened, oiled
12.0	0.3	Steel	Phosphated or blackened, oiled
14.0	0.3	Steel	Phosphated or blackened, oiled
15.0	0.5	Steel	Phosphated or blackened, oiled
16.0	0.4	Steel	Phosphated or blackened, oiled
17.0	0.5	Steel	Phosphated or blackened, oiled
18.0	0.4	Steel	Phosphated or blackened, oiled
19.0	0.5	Steel	Phosphated or blackened, oiled
20.0	0.5	Steel	Phosphated or blackened, oiled
22.0	0.5	Steel	Phosphated or blackened, oiled
23.0	0.5	Steel	Phosphated or blackened, oiled
25.0	0.5	Steel	Phosphated or blackened, oiled
28.0	0.5	Steel	Phosphated or blackened, oiled
30.0	0.5	Steel	Phosphated or blackened, oiled
35.0	0.5	Steel	Phosphated or blackened, oiled
45.0	0.5	Steel	Phosphated or blackened, oiled
3.0	0.25	Stainless steel	Specify in enquiry
4.0	0.25	Stainless steel	Specify in enquiry
5.0	0.25	Stainless steel	Specify in enquiry
6.0	0.25	Stainless steel	Specify in enquiry
7.0	0.25	Stainless steel	Specify in enquiry
8.0	0.25	Stainless steel	Specify in enquiry

Size / reference mm	Thickness / wire mm	Material	Finish
9.0	0.3	Stainless steel	Specify in enquiry
10.0	0.3	Stainless steel	Specify in enquiry
12.0	0.3	Stainless steel	Specify in enquiry
14.0	0.3	Stainless steel	Specify in enquiry
15.0	0.5	Stainless steel	Specify in enquiry
16.0	0.4	Stainless steel	Specify in enquiry
17.0	0.5	Stainless steel	Specify in enquiry
18.0	0.4	Stainless steel	Specify in enquiry
20.0	0.5	Stainless steel	Specify in enquiry
22.0	0.5	Stainless steel	Specify in enquiry
23.0	0.5	Stainless steel	Specify in enquiry
25.0	0.5	Stainless steel	Specify in enquiry
30.0	0.5	Stainless steel	Specify in enquiry
35.0	0.5	Stainless steel	Specify in enquiry

Ring dimensions · mm

A dash means an undocumented value, not zero.

Reference mm	s	d3	d4
1.5	0,250	1,400	6,00
10.0	0,300	9,750	16,00
12.0	0,300	11,700	18,00
14.0	0,300	13,700	20,50
15.0	0,500	14,600	23,00
16.0	0,400	15,600	24,50
17.0	0,500	16,600	26,00
18.0	0,400	17,600	27,00
19.0	0,500	18,600	28,00
2.0	0,250	1,850	6,50
20.0	0,500	19,500	29,00
22.0	0,500	21,500	31,00
23.0	0,500	22,500	31,50
25.0	0,500	24,500	34,00
28.0	0,500	27,500	37,00
3.0	0,250	2,800	8,00

Reference mm	s	d3	d4
3.5	0,250	3,300	8,20
30.0	0,500	29,500	40,00
35.0	0,500	34,500	46,00
4.0	0,250	3,800	9,00
45.0	0,500	44,500	60,00
5.0	0,250	4,800	10,00
6.0	0,250	5,800	11,00
7.0	0,250	6,800	12,00
8.0	0,250	7,750	13,00
9.0	0,300	8,750	14,00

Request a quote

Specify type, standard, diameter, material, finish, quantity, application and required delivery. Attach the seat drawing. Other materials and finishes are available on request.

www.dueemmesidol.it

