


Rivet nut · Countersunk head · Smooth cylindrical · Open end

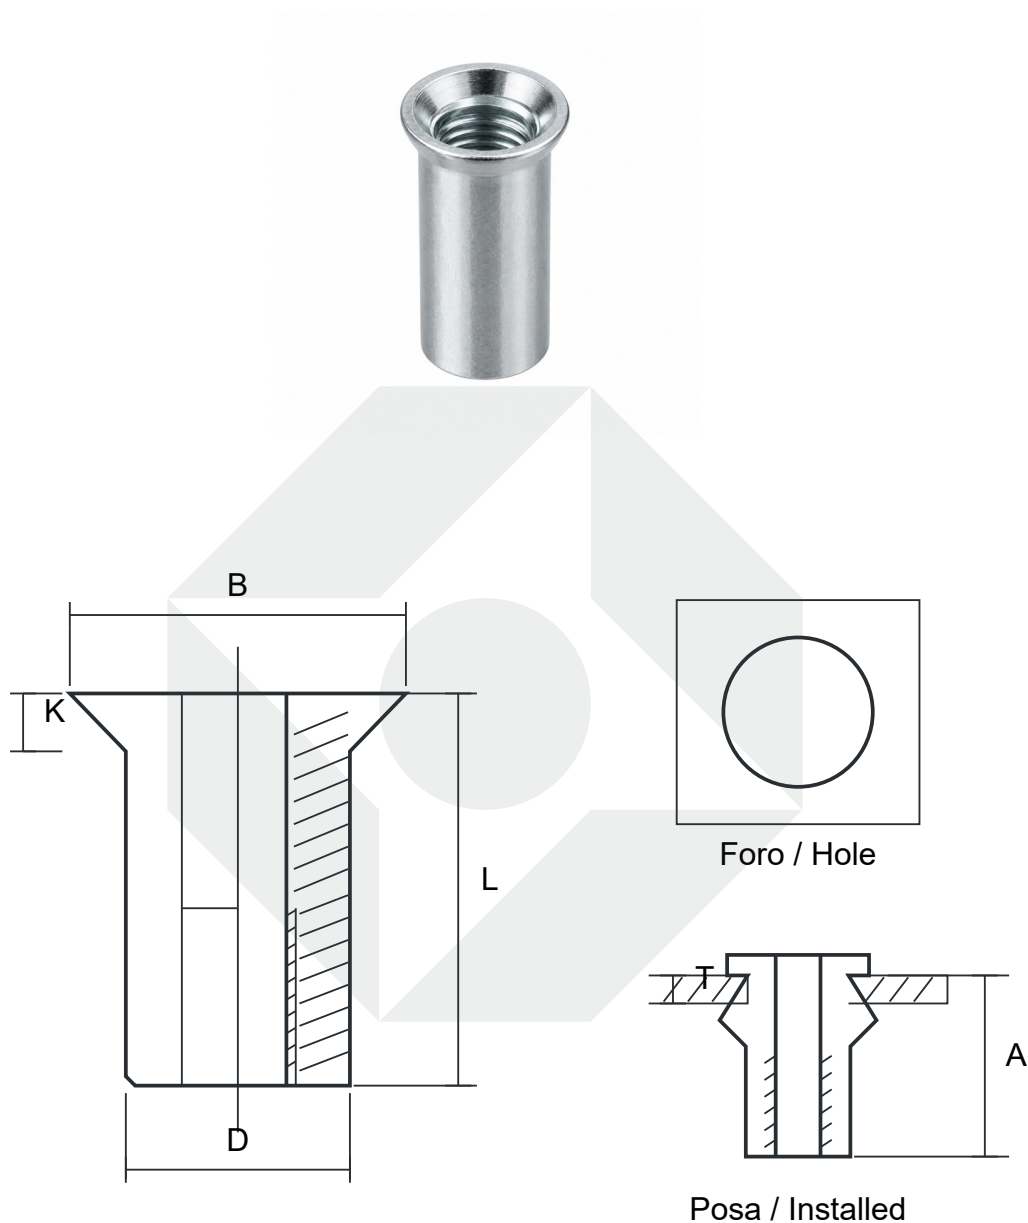

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Stainless steel

Configurations on request.

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTSM3C2	M3	1.5-3.0	5,0
KTSM4C2	M4	1.5-3.0	6,0
KTSM5C2	M5	1.5-3.5	7,0
KTSM6C2	M6	1.5-4.0	9,0
KTSM8C2	M8	1.5-4.5	11,0
KTSM10C2/13	M10	1.5-4.5	13,0
KTSM12C2/15	M12	1.5-5.0	15,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTSM3C2	5,0	4,9	7,8	1,5	9,5
KTSM4C2	6,0	5,9	9,0	1,5	11,0
KTSM5C2	8,0	6,9	10,0	1,5	14,0
KTSM6C2	9,0	8,9	12,0	1,5	15,0
KTSM8C2	10,0	10,9	14,0	1,5	16,5
KTSM10C2/13	11,0	12,9	16,0	1,7	19,0
KTSM12C2/15	13,5	14,9	18,0	1,8	22,5

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/- 0,2 · L +/- 0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTSM4C1	M4	1.5-3.0	6,0
KTSM5C1	M5	1.5-3.5	7,0
KTSM6C1	M6	1.5-4.0	9,0
KTSM8C1	M8	2.0-4.5	11,0
KTSM10C1/13	M10	2.0-5.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTSM4C1	6,5	5,9	9,0	1,5	12,0
KTSM5C1	7,5	6,9	10,0	1,5	13,0
KTSM6C1	9,0	8,9	12,0	1,5	15,5
KTSM8C1	11,0	10,9	14,0	1,5	18,5
KTSM10C1/13	13,0	12,9	16,0	1,5	21,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.