


Rivet nut · Reduced head · Hexagonal · Closed end

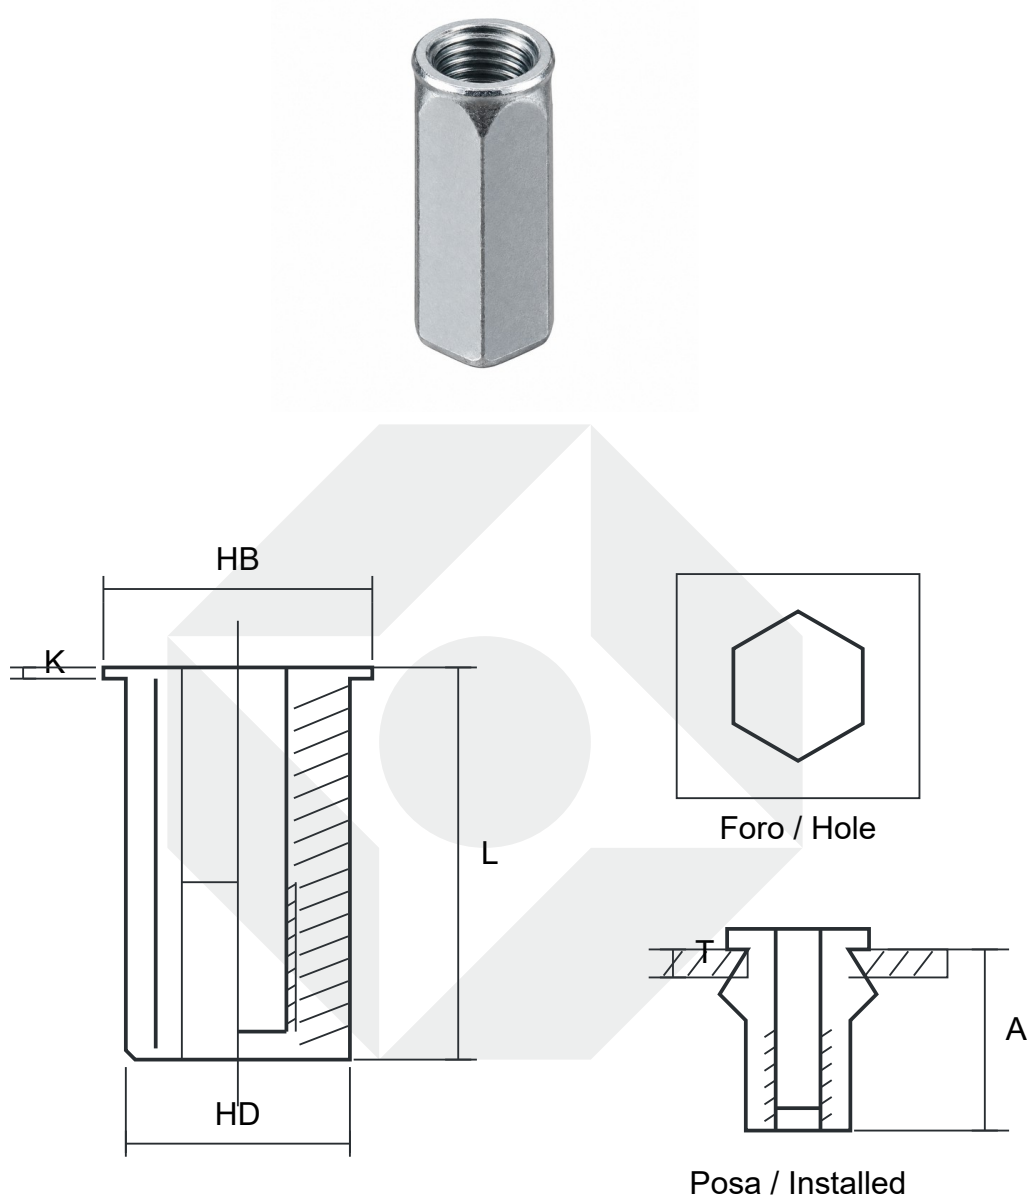

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · HD +0.07 -0.1 · HB +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRECM4C1	M4	0.5-2.5	6,0
KTRECM4L1	M4	2.5-4.0	6,0
KTRECM5C1	M5	0.5-3.0	7,0
KTRECM5L1	M5	3.0-5.0	7,0
KTRECM6C1	M6	0.5-3.5	9,0
KTRECM6L1	M6	3.5-5.5	9,0
KTRECM8C1	M8	1.0-4.0	11,0
KTRECM8L1	M8	4.0-6.0	11,0
KTRECM10C1/13	M10	1.0-4.0	13,0
KTRECM10L1/13	M10	4.0-6.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRECM4C1	12,3	5,9	7,0	0,5	16,0
KTRECM4L1	12,3	5,9	7,0	0,5	18,0
KTRECM5C1	15,2	6,9	8,0	0,6	20,0
KTRECM5L1	15,2	6,9	8,0	0,6	23,0
KTRECM6C1	14,5	8,9	10,0	0,6	20,5
KTRECM6L1	14,5	8,9	10,0	0,6	23,5
KTRECM8C1	17,0	10,9	12,0	0,7	23,0
KTRECM8L1	17,0	10,9	12,0	0,7	25,0
KTRECM10C1/13	20,0	12,9	14,5	0,85	28,5
KTRECM10L1/13	20,0	12,9	14,5	0,85	30,5

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.