


Rivet nut · Reduced head · Knurled cylindrical · Closed end

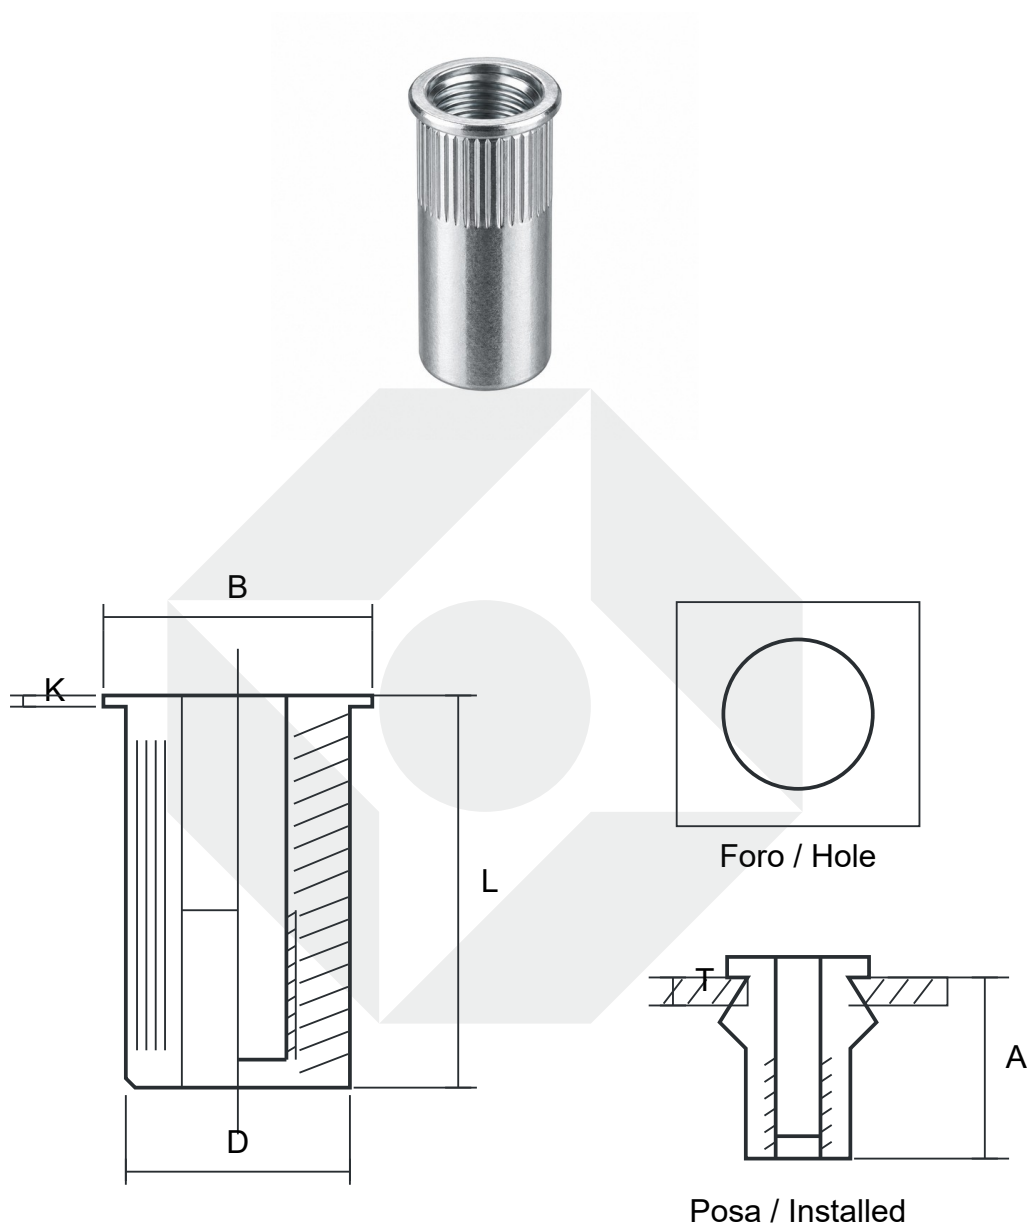

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Stainless steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRZCM3C2	M3	0.5-1.5	5,0
KTRZCM3L2	M3	1.5-2.5	5,0
KTRZCM4C2	M4	0.5-2.0	6,0
KTRZCM4L2	M4	2.0-4.0	6,0
KTRZCM5C2	M5	0.5-2.5	7,0
KTRZCM5L2	M5	2.5-4.5	7,0
KTRZCM6C2	M6	0.5-3.0	9,0
KTRZCM6L2	M6	3.0-4.5	9,0
KTRZCM8C2	M8	0.5-3.5	11,0
KTRZCM8L2	M8	3.0-4.5	11,0
KTRZCM10C2/13	M10	0.5-3.5	13,0
KTRZCM10L2/15	M10	3.0-5.0	13,0
KTRZCM12C2	M12	2.0-4.0	15,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRZCM3C2	—	4,9	6,0	0,50	11,0
KTRZCM3L2	—	4,9	6,0	0,50	13,0
KTRZCM4C2	11,0	5,9	7,0	0,50	15,0
KTRZCM4L2	11,0	5,9	7,0	0,50	16,5
KTRZCM5C2	12,5	6,9	8,0	0,60	16,5
KTRZCM5L2	12,5	6,9	8,0	0,60	18,0
KTRZCM6C2	15,5	8,9	10,0	0,60	20,5
KTRZCM6L2	15,5	8,9	10,0	0,60	22,0
KTRZCM8C2	17,0	10,9	12,3	0,60	23,0
KTRZCM8L2	17,0	10,9	12,3	0,60	24,5
KTRZCM10C2/13	18,2	12,9	14,5	0,85	24,5
KTRZCM10L2/15	18,2	12,9	14,5	0,85	26,0
KTRZCM12C2	20,0	14,9	16,5	0,85	28,0

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRZCM4C1	M4	0.5-2.0	6,0
KTRZCM4L1	M4	2.0-3.5	6,0
KTRZCM5C1	M5	0.5-2.0	7,0
KTRZCM5L1	M5	2.0-3.5	7,0
KTRZCM6C1	M6	0.5-3.0	9,0
KTRZCM6L1	M6	3.0-4.5	9,0
KTRZCM8C1	M8	0.5-3.0	11,0
KTRZCM8L1	M8	3.0-4.5	11,0
KTRZCM10C1/13	M10	1.0-3.0	13,0
KTRZCM10L1/13	M10	3.0-5.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRZCM4C1	11,0	5,9	7,0	0,5	15,0
KTRZCM4L1	11,0	5,9	7,0	0,5	16,5
KTRZCM5C1	12,5	6,9	8,0	0,5	16,5
KTRZCM5L1	12,5	6,9	8,0	0,5	18,0
KTRZCM6C1	15,5	8,9	10,0	0,6	20,5
KTRZCM6L1	15,5	8,9	10,0	0,6	22,0
KTRZCM8C1	17,0	10,9	12,0	0,65	23,0
KTRZCM8L1	17,0	10,9	12,0	0,65	24,5
KTRZCM10C1/13	18,2	12,9	14,0	0,7	24,5
KTRZCM10L1/13	18,2	12,9	14,0	0,7	26,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.