


## Rivet nut · Reduced head · Smooth cylindrical · Closed end

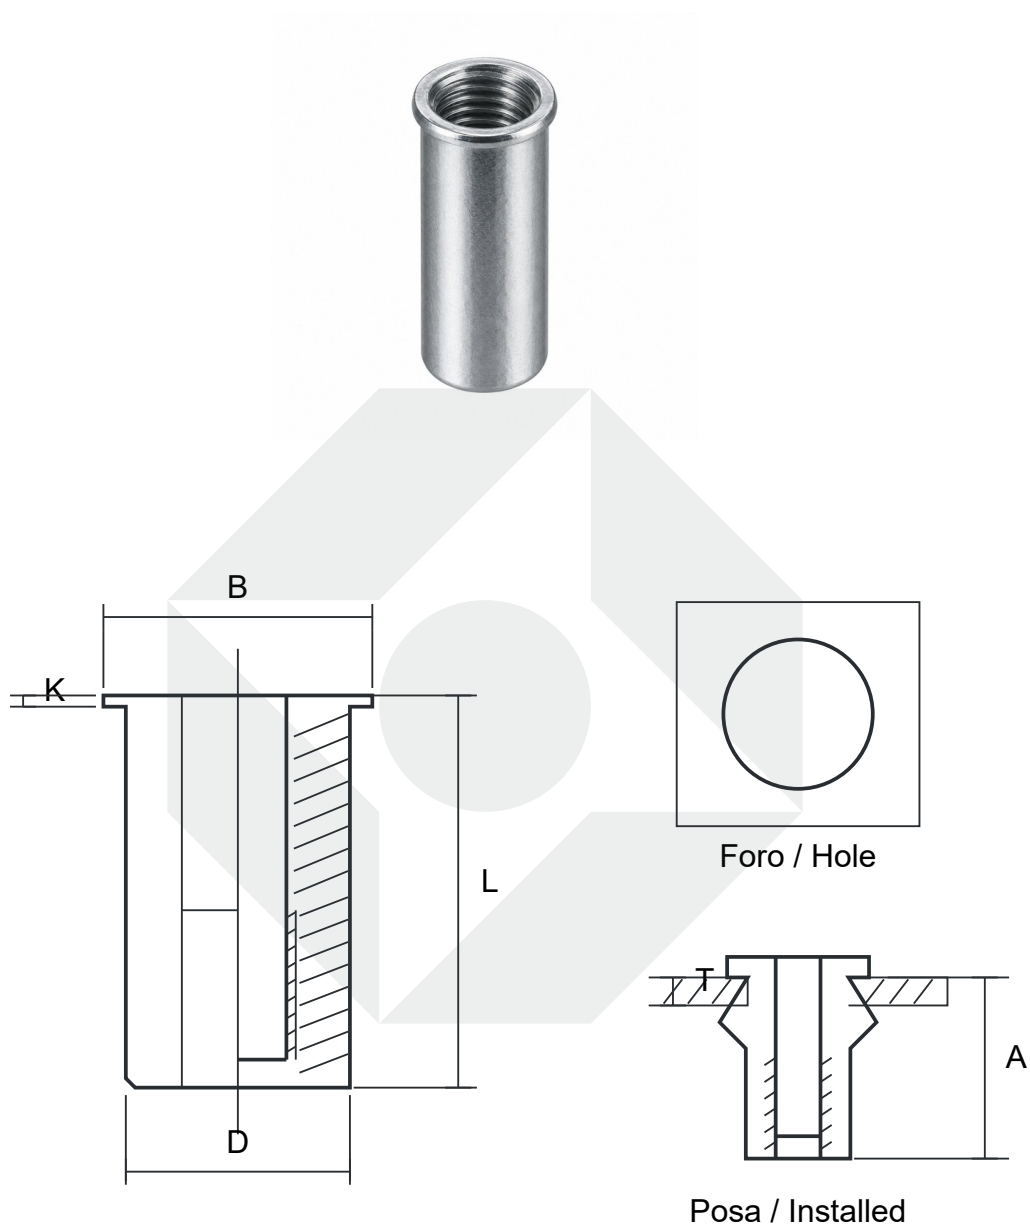

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

## Steel

Configurations on request.

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

### Variants — mm

| Dueemme code | Thread | Grip    | Hole |
|--------------|--------|---------|------|
| KTRCM4C1     | M4     | 0.5-2.0 | 6,0  |
| KTRCM4L1     | M4     | 2.0-3.5 | 6,0  |
| KTRCM5C1     | M5     | 0.5-2.0 | 7,0  |
| KTRCM5L1     | M5     | 2.0-3.5 | 7,0  |
| KTRCM6C1     | M6     | 0.5-2.5 | 9,0  |
| KTRCM6L1     | M6     | 2.5-4.0 | 9,0  |
| KTRCM8C1     | M8     | 0.5-3.0 | 11,0 |
| KTRCM8L1     | M8     | 2.5-4.5 | 11,0 |
| KTRCM10C1/13 | M10    | 1.0-3.0 | 13,0 |
| KTRCM10L1/13 | M10    | 3.0-5.0 | 13,0 |

### Dimensions — mm

| Dueemme code | A    | D / HD | B / HB | K    | L    |
|--------------|------|--------|--------|------|------|
| KTRCM4C1     | 11,0 | 5,9    | 7,0    | 0,5  | 15,0 |
| KTRCM4L1     | 11,0 | 5,9    | 7,0    | 0,5  | 16,0 |
| KTRCM5C1     | 12,5 | 6,9    | 8,0    | 0,5  | 16,5 |
| KTRCM5L1     | 12,5 | 6,9    | 8,0    | 0,5  | 17,5 |
| KTRCM6C1     | 15,5 | 8,9    | 10,0   | 0,6  | 20,5 |
| KTRCM6L1     | 15,5 | 8,9    | 10,0   | 0,6  | 22,0 |
| KTRCM8C1     | 17,0 | 10,9   | 12,0   | 0,65 | 23,0 |
| KTRCM8L1     | 17,0 | 10,9   | 12,0   | 0,65 | 24,5 |
| KTRCM10C1/13 | 18,2 | 12,9   | 14,1   | 0,7  | 24,5 |
| KTRCM10L1/13 | 18,2 | 12,9   | 14,1   | 0,7  | 26,0 |

### Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.