


Rivet nut · Reduced head · Smooth cylindrical · Open end

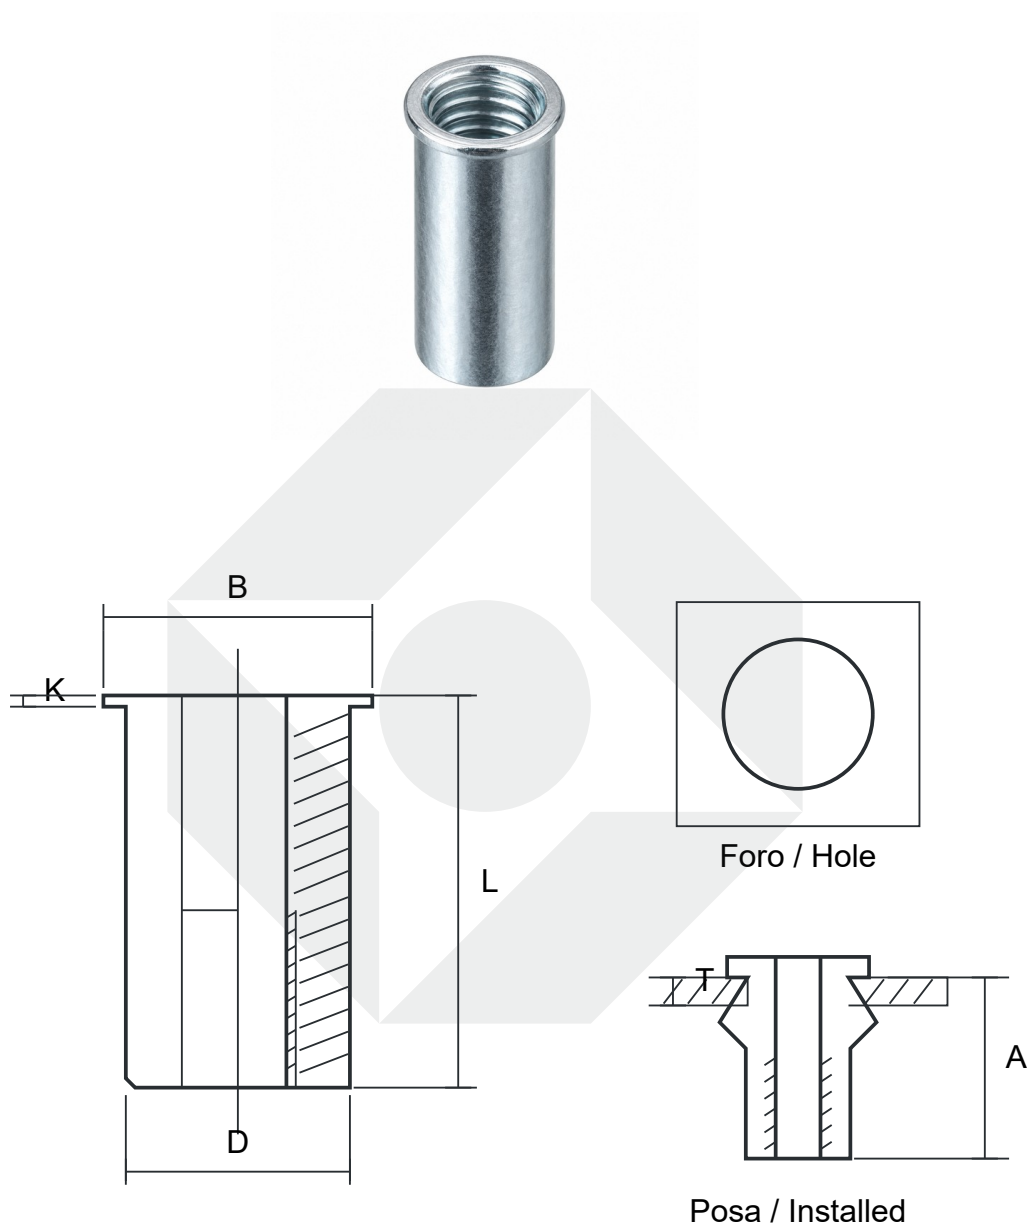

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Aluminium

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B · K · L

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRM5C3	M5	0.5-2.0	7,0
KTRM6C3	M6	0.5-2.5	9,0
KTRM8C3	M8	0.5-2.5	11,0
KTRM10C3/13	M10	1.0-3.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRM5C3	7,5	6,9	8,0	0,5	11,5
KTRM6C3	9,2	8,9	10,0	0,6	14,0
KTRM8C3	10,2	10,9	12,0	0,65	15,5
KTRM10C3/13	11,5	12,9	14,1	0,7	17,7



Stainless steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRM3C2	M3	0.5-1.5	5,0
KTRM4C2	M4	0.5-1.5	6,0
KTRM5C2	M5	0.5-2.0	7,0
KTRM6C2	M6	0.5-3.0	9,0
KTRM8C2	M8	0.5-3.5	11,0
KTRM10C2/13	M10	0.5-3.5	13,0
KTRM12C2/15	M12	0.5-3.5	15,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRM3C2	5,0	4,9	5,5	0,35	8,5
KTRM4C2	5,5	5,9	7,0	0,50	10,0
KTRM5C2	6,0	6,9	8,0	0,60	12,0
KTRM6C2	9,0	8,9	10,0	0,60	14,5
KTRM8C2	10,0	10,9	12,3	0,60	16,5
KTRM10C2/13	12,0	12,9	14,5	0,85	19,0
KTRM12C2/15	14,5	14,9	16,5	0,85	22,5

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTRM3C1	M3	0.5-1.5	5,0
KTRM4C1	M4	0.5-2.0	6,0
KTRM4L1	M4	2.0-4.0	6,0
KTRM5C1	M5	0.5-2.0	7,0
KTRM5L1	M5	2.0-4.0	7,0
KTRM6C1	M6	0.5-2.5	9,0
KTRM6L1	M6	2.5-5.0	9,0
KTRM8C1	M8	0.5-3.0	11,0
KTRM8L1	M8	3.0-5.0	11,0
KTRM10C1/13	M10	0.5-3.0	13,0
KTRM10L1/13	M10	3.0-5.5	13,0
KTRM10C1/12	M10	0.5-3.0	12,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTRM3C1	6,2	4,9	6,0	0,5	9,0
KTRM4C1	6,5	5,9	7,0	0,5	10,5
KTRM4L1	6,5	5,9	7,0	0,5	13,0
KTRM5C1	7,0	6,9	8,0	0,5	11,5
KTRM5L1	7,0	6,9	8,0	0,5	13,0
KTRM6C1	8,5	8,9	10,5	0,6	14,0
KTRM6L1	8,5	8,9	10,0	0,6	17,0
KTRM8C1	10,0	10,9	12,0	0,65	16,5
KTRM8L1	10,0	10,9	12,0	0,65	18,5
KTRM10C1/13	13,0	12,9	14,1	0,7	17,7
KTRM10L1/13	13,0	12,9	14,1	0,7	21,0
KTRM10C1/12	12,5	11,9	13,0	0,7	18,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.