


Rivet nut · Round / large head · Hexagonal · Closed end

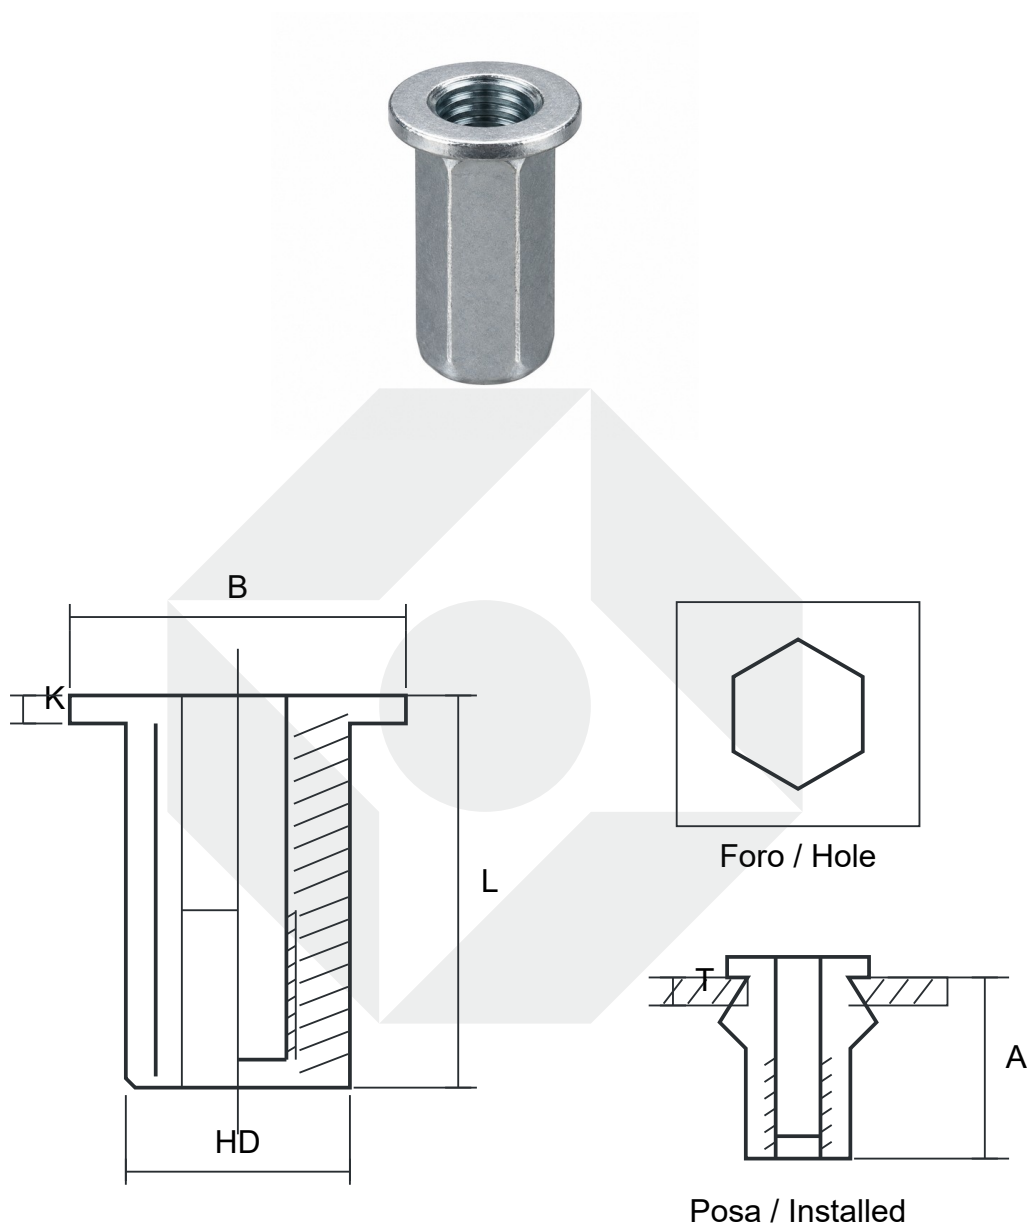

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · HD +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTTECM4C1	M4	0.5-2.0	6,0
KTTECM4L1	M4	2.0-4.0	6,0
KTTECM5C1	M5	0.5-2.5	7,0
KTTECM5L1	M5	2.5-5.0	7,0
KTTECM6C1	M6	0.5-3.0	9,0
KTTECM6L1	M6	3.0-5.5	9,0
KTTECM8C1	M8	1.0-3.5	11,0
KTTECM8L1	M8	3.5-5.5	11,0
KTTECM10C1/13	M10	1.0-4.0	13,0
KTTECM10L1/13	M10	4.0-6.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTTECM4C1	11,0	5,9	9,0	1,0	15,0
KTTECM4L1	11,0	5,9	9,0	1,0	17,0
KTTECM5C1	13,5	6,9	10,0	1,0	18,0
KTTECM5L1	13,5	6,9	10,0	1,0	20,0
KTTECM6C1	17,0	8,9	12,7	1,5	23,0
KTTECM6L1	17,0	8,9	12,7	1,5	25,0
KTTECM8C1	19,0	10,9	16,0	1,5	26,0
KTTECM8L1	19,0	10,9	16,0	1,5	29,0
KTTECM10C1/13	25,0	12,9	19,0	1,8	33,0
KTTECM10L1/13	25,0	12,9	19,0	1,8	35,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.