


Rivet nut · Round / large head · Smooth cylindrical · Closed end

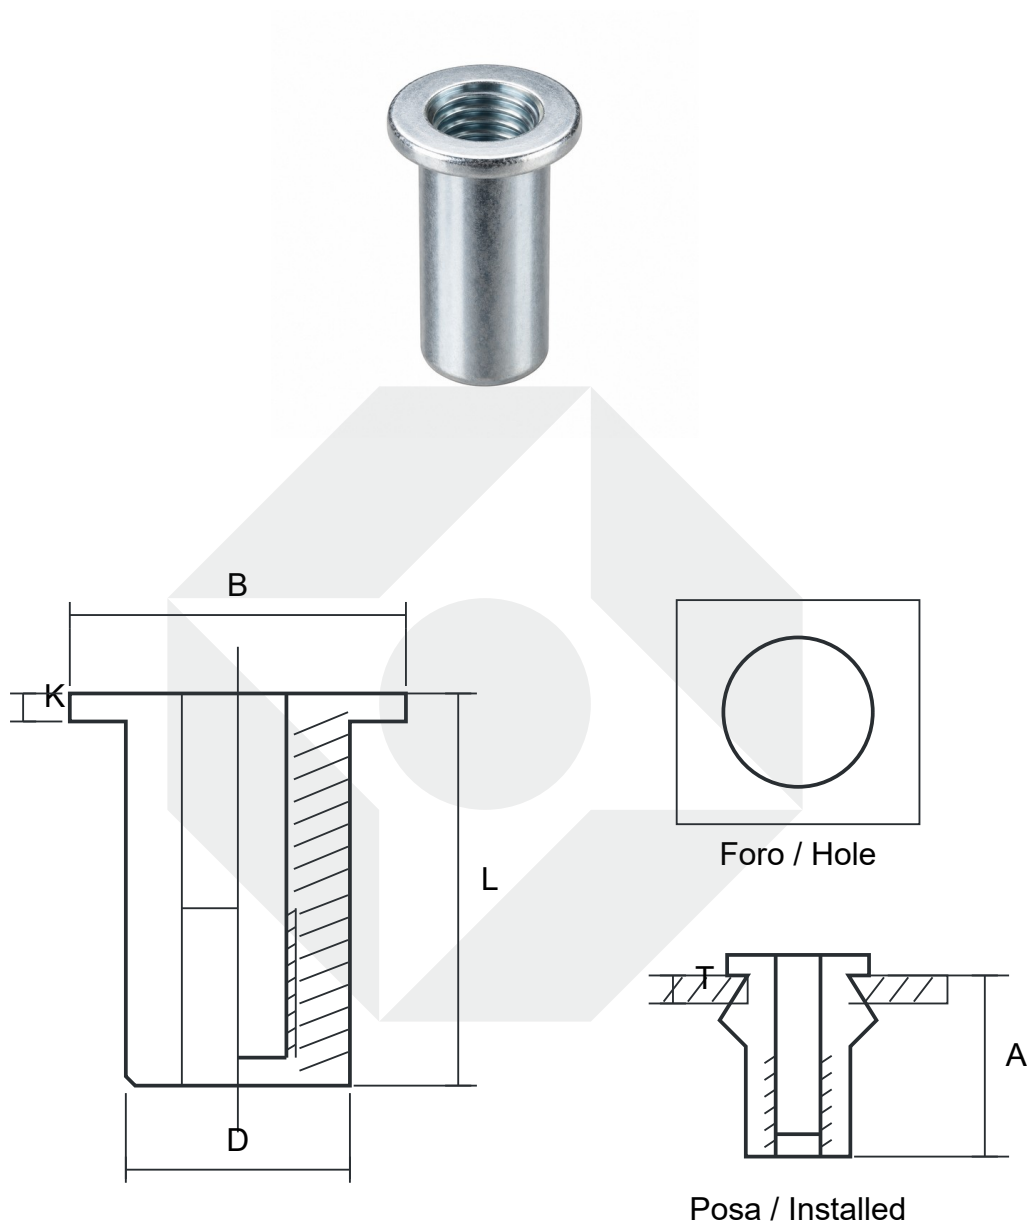

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Steel

Configurations on request.

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTTTCM3C1	M3	0.5-1.5	5,0
KTTTCM4C1	M4	0.5-2.0	6,0
KTTTCM4L1	M4	2.0-4.0	6,0
KTTTCM5C1	M5	0.5-2.5	7,0
KTTTCM5L1	M5	2.5-5.0	7,0
KTTTCM6C1	M6	0.5-3.0	9,0
KTTTCM6L1	M6	3.0-5.5	9,0
KTTTCM8C1	M8	0.5-3.0	11,0
KTTTCM8L1	M8	3.0-5.5	11,0
KTTTCM10C1/13	M10	1.0-4.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTTTCM3C1	10,0	4,9	7,2	0,8	13,3
KTTTCM4C1	11,3	5,9	9,0	0,8	16,0
KTTTCM4L1	11,3	5,9	9,0	0,8	18,0
KTTTCM5C1	11,5	6,9	10,0	1,0	17,0
KTTTCM5L1	11,5	6,9	10,0	1,0	19,0
KTTTCM6C1	12,7	8,9	12,3	1,3	19,2
KTTTCM6L1	12,7	8,9	12,3	1,3	21,0
KTTTCM8C1	14,8	10,9	15,0	1,5	21,5
KTTTCM8L1	14,8	10,9	15,0	1,5	24,0
KTTTCM10C1/13	19,2	12,9	17,0	1,6	27,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.