


Rivet nut · Round / large head · Smooth cylindrical · Open end

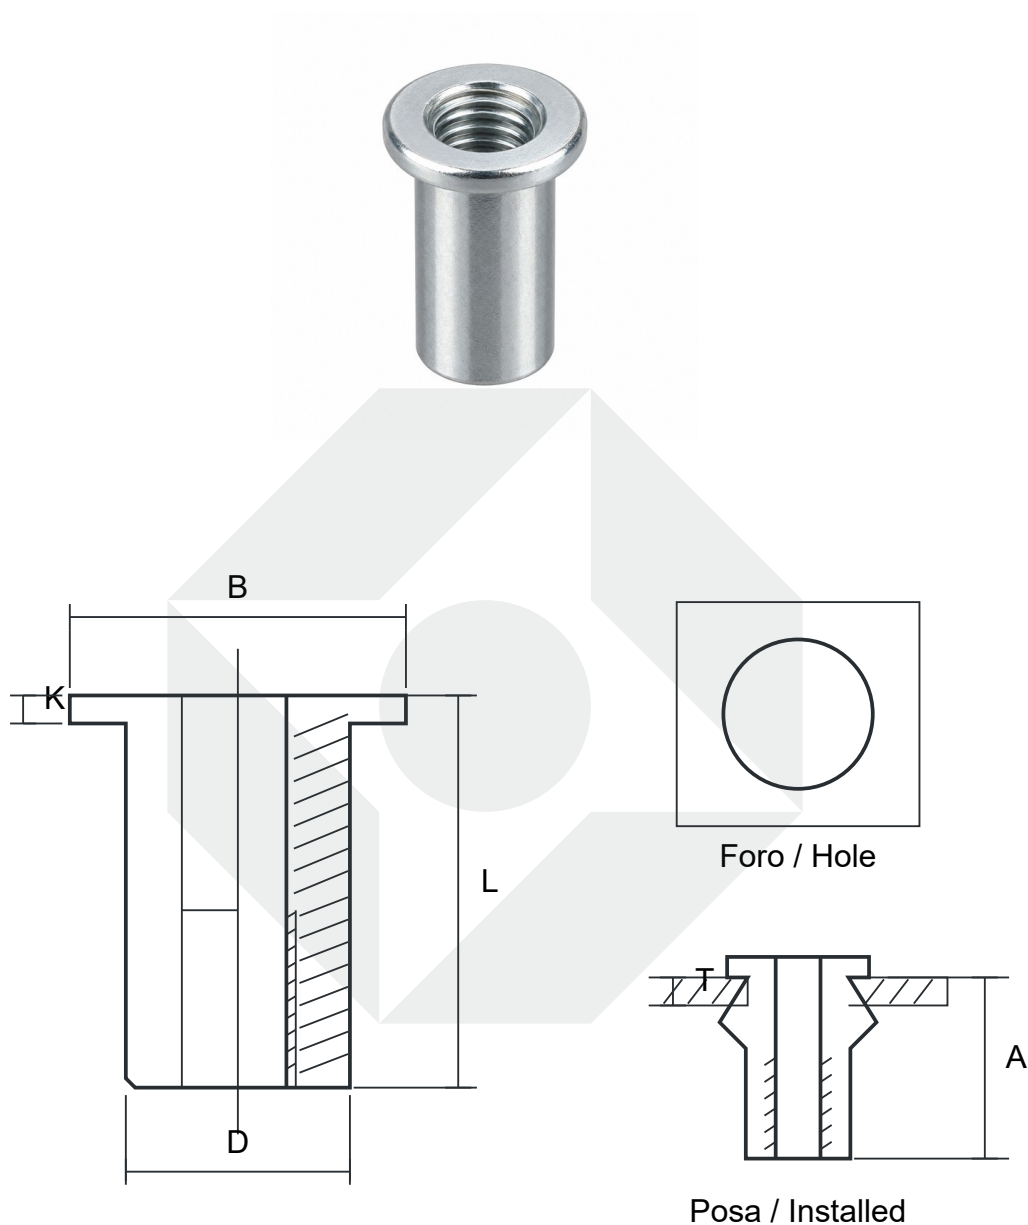

Identification drawing, not to scale. A denotes reference projection after installation. Thread pitch is not specified in the catalogue. Check thread, mounting hole and grip range before ordering. Availability and supply conditions require confirmation.

Aluminium

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B · K · L

Variants — mm

Dueemme code	Thread	Grip	Hole
KTTM3C3	M3	0.5-1.5	5,0
KTTM4C3	M4	0.5-2.0	6,0
KTTM5C3	M5	0.5-2.5	7,0
KTTM6C3	M6	0.5-2.5	9,0
KTTM8C3	M8	1.0-3.0	11,0
KTTM10C3/13	M10	1.0-4.0	13,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTTM3C3	—	4,9	8,0	0,75	9,0
KTTM4C3	6,0	5,9	8,8	0,8	10,5
KTTM5C3	7,5	6,9	10,0	1,0	13,0
KTTM6C3	9,2	8,9	12,3	1,5	15,0
KTTM8C3	10,2	10,9	14,3	1,5	16,5
KTTM10C3/13	11,5	12,9	16,3	1,6	19,0

Stainless steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTTM3C2	M3	0.5-2.0	5,0
KTTM4C2	M4	0.5-2.0	6,0
KTTM5C2	M5	0.5-2.5	7,0
KTTM6C2	M6	0.5-3.0	9,0
KTTM8C2	M8	0.5-3.5	11,0
KTTM10C2/13	M10	1.0-3.5	13,0
KTTM12C2/16	M12	1.0-3.5	16,0
KTTM12C2/15	M12	1.0-3.5	15,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTTM3C2	4,5	4,9	7,0	0,8	8,8
KTTM4C2	6,0	5,9	9,0	0,8	10,8
KTTM5C2	7,0	6,9	10,0	1,0	13,0
KTTM6C2	8,5	8,9	13,0	1,5	15,0
KTTM8C2	11,0	10,9	15,0	1,5	18,0
KTTM10C2/13	12,0	12,9	17,0	1,8	20,3
KTTM12C2/16	16,0	15,9	19,0	1,8	22,0
KTTM12C2/15	16,0	14,9	19,0	1,8	22,0

Steel

Catalogue tolerances (mm): A Ref · Hole size +0.10 · D +0.07 -0.1 · B +/-0,3 · K +/-0,2 · L +/-0,3

Variants — mm

Dueemme code	Thread	Grip	Hole
KTTM3C1	M3	0.5-1.5	5,0
KTTM3L1	M3	1.5-2.5	5,0
KTTM4C1	M4	0.5-2.0	6,0
KTTM4L1	M4	2.0-3.5	6,0
KTTM5C1	M5	0.5-2.5	7,0
KTTM5L1	M5	2.5-5.0	7,0
KTTM6C1	M6	0.5-3.0	9,0
KTTM6L1	M6	3.0-5.5	9,0
KTTM8C1	M8	0.5-3.5	11,0
KTTM8L1	M8	3.5-6.0	11,0
KTTM10C1/13	M10	0.5-2.5	13,0
KTTM10L1/13	M10	2.5-4.0	13,0
KTTM10C1/12	M10	1.0-3.5	12,0
KTTM12C1/15	M12	1.0-4.0	15,0
KTTM12L1/15	M12	4.0-6.5	15,0
KTTM12C1/16	M12	1.0-4.0	16,0

Dimensions — mm

Dueemme code	A	D / HD	B / HB	K	L
KTTM3C1	4,7	4,9	7,2	0,8	8,5
KTTM3L1	4,7	4,9	7,2	0,8	9,5
KTTM4C1	6,0	5,9	8,5	0,8	10,3
KTTM4L1	6,0	5,9	8,5	0,8	12,0
KTTM5C1	7,5	6,9	10,0	1,0	13,0
KTTM5L1	8,5	6,9	10,0	1,0	17,0
KTTM6C1	9,2	8,9	12,3	1,3	15,5
KTTM6L1	9,2	8,9	12,3	1,3	18,0
KTTM8C1	11,5	10,9	15,0	1,5	18,5
KTTM8L1	11,5	10,9	15,0	1,5	21,0
KTTM10C1/13	11,5	12,9	16,3	1,5	17,0

Dueemme code	A	D / HD	B / HB	K	L
KTTM10L1/13	12,5	12,9	17,0	1,6	21,0
KTTM10C1/12	11,0	11,9	16,0	1,6	19,0
KTTM12C1/15	13,5	14,9	18,0	1,7	22,0
KTTM12L1/15	13,5	14,9	18,0	1,7	25,0
KTTM12C1/16	16,0	15,9	22,0	2,0	25,0

Request a quotation

Specify Dueemme code, quantity, annual usage, delivery and application. Attach the mounting drawing and specify sheet thickness.

