ISO 228-1 welding nipple



A connector with one threaded end and one welding end. Compare outside diameter, length and wall thickness.

Material


AISI 304 / A2 · AISI 316 / A4

Thread / standard

ISO 228-1

Parallel threads: sealing is not made on the threads alone. Specify the joint sealing arrangement.

Technical configuration

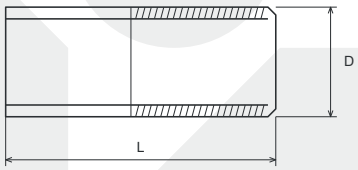

Original illustrative drawing. Not to scale; use the documented variant dimensions for selection.

Variants and dimensions

Material	Ø (")	D (mm)	L (mm)	Wall thickness (mm)
AISI 304 / A2	1/8"	10.2	20	1.5
AISI 316 / A4	1/8"	10.2	20	1.5
AISI 304 / A2	1/4"	13.7	25	2
AISI 316 / A4	1/4"	13.7	25	2
AISI 304 / A2	3/8"	17.2	25	2
AISI 316 / A4	3/8"	17.2	25	2
AISI 304 / A2	1/2"	21.3	30	2.5

https://www.dueemmesidol.it/en/products/stainless-steel-fittings/iso-228-1-welding-nipple/

Material	Ø (")	D (mm)	L (mm)	Wall thickness (mm)
AISI 316 / A4	1/2"	21.3	30	2.5
AISI 304 / A2	3/4"	26.9	30	3
AISI 316 / A4	3/4"	26.9	30	3
AISI 304 / A2	1"	33.7	35	3
AISI 316 / A4	1"	33.7	35	3
AISI 304 / A2	1"1/4	42.4	38	3
AISI 316 / A4	1"1/4	42.4	38	3
AISI 304 / A2	1"1/2	48.3	40	3
AISI 316 / A4	1"1/2	48.3	40	3
AISI 304 / A2	2"	60.3	45	3.6
AISI 316 / A4	2"	60.3	45	3.6
AISI 304 / A2	3"	88.9	55	4
AISI 316 / A4	3"	88.9	55	4

Technical documentation and supply

Specify the application and required documentation. Dimensions not shown here and supply availability are confirmed for the selected configuration.